

RoHS Compliant



Specifications:

Material And Finish:

Insulator:LCP UL94V-0

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:50V AC/DC

Operating Temperature Range:-40°~+85°C

Electrical:

Contact resistance:40m Ohm Max

Insulator resistance:800M ohm min.


Withstanding Voltage:200V AC/Minute

Ordering Information

F1001M-XXX-02-X

1 2 3 4 5

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — S:Matte Tin Plated
A:Gold Flash
5: — A:In bag
B:In Tube
C:In Tray
F:W/Cap In Tape&Reel

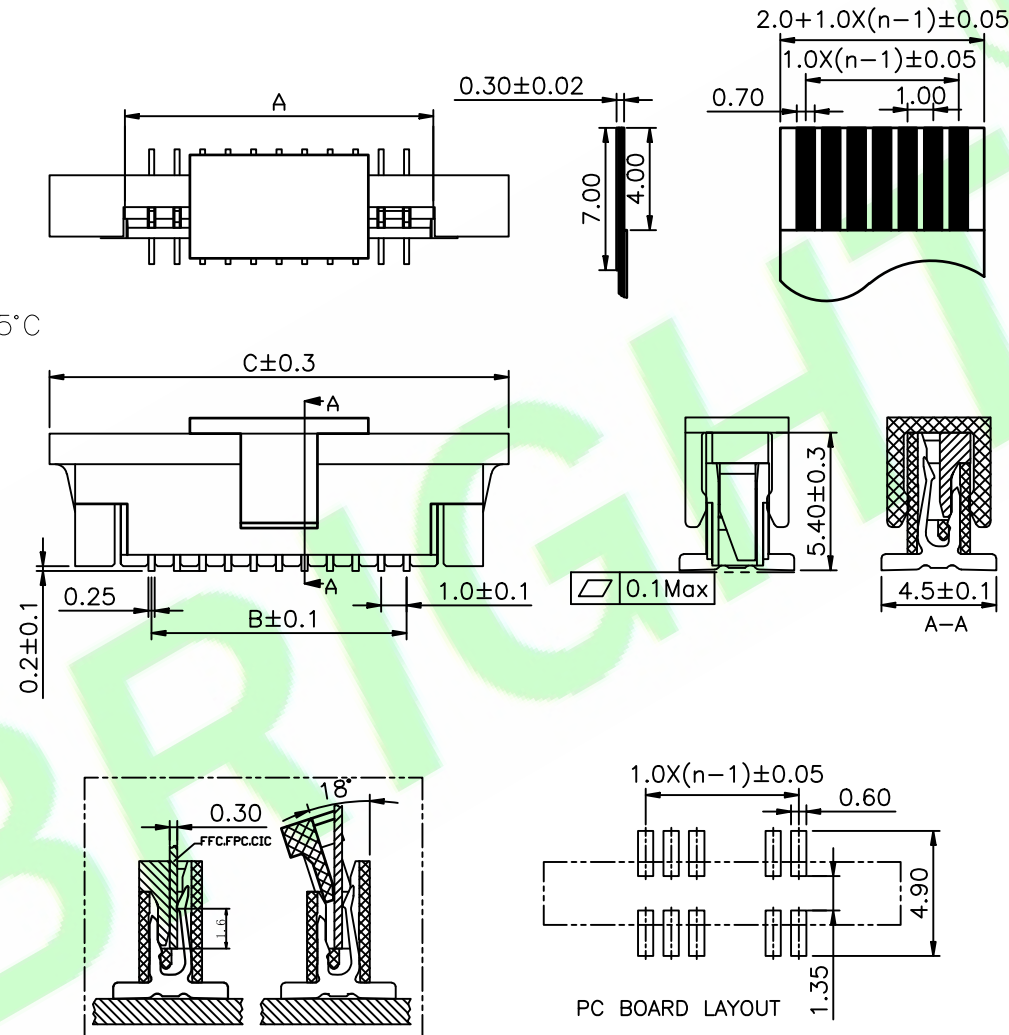


Pin	Dimensions		
	A	B	C
04	5.07	5.0	11.0
05	6.07	6.0	12.0
06	7.07	7.0	13.0
07	8.07	8.0	14.0
08	9.07	9.0	15.0
09	10.07	10.0	16.0
10	11.07	11.0	17.0
11	12.07	12.0	18.0
12	13.07	13.0	19.0
13	14.07	14.0	20.0
14	15.07	15.0	21.0
15	16.07	16.0	22.0
16	17.07	17.0	23.0
17	18.07	18.0	24.0
18	19.07	19.0	25.0
19	20.07	20.0	26.0
20	21.07	21.0	27.0
21	22.07	22.0	28.0
22	23.07	23.0	29.0
23	24.07	24.0	30.0
24	25.07	25.0	31.0
25	26.07	26.0	32.0
26	27.07	27.0	33.0
27	28.07	28.0	34.0
28	29.07	29.0	35.0
29	30.07	30.0	36.0
30	31.07	31.0	37.0
31	32.07	32.0	38.0
32	33.07	33.0	39.0

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : F1001M-XXX-02-X
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	TITLE : 1.0mm Pitch FPC SMT Type (拉拔式立贴)
	X.XXX: ±0.10	X.XXX': ±1.0°	
DATE: 20-Oct-2014			

HJBRIGHT® 东莞市華晶电子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

2X	Drawing update	Bin	20250607
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4