







Specifications:
Material And Finish:
Plated:See Ordering Information

Rating:
Current Rating:1.0 Amp
Voltage Rating:50V AC/DC
Operating Temperature Range:-40°C~+85°C

Electrical:
Contact resistance:40m Ohm Max
Insulator resistance:800M ohm min.
Withstanding Voltage:200V AC/Minute

Ordering Information
F1250R-XXX-01-XX
1 2 3 4 5 6

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — A:Gold Flash
Q: Tin Plated
S: Matte Tin Plated
5: — L: LCP
P: PA9T
6: — A: In bag
B: In Tube
C: In Tray
G: In Tape & Reel

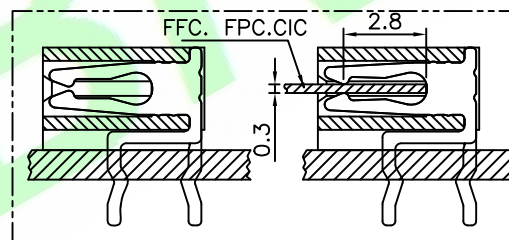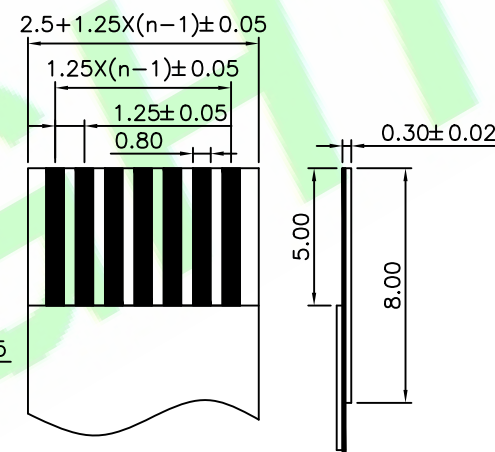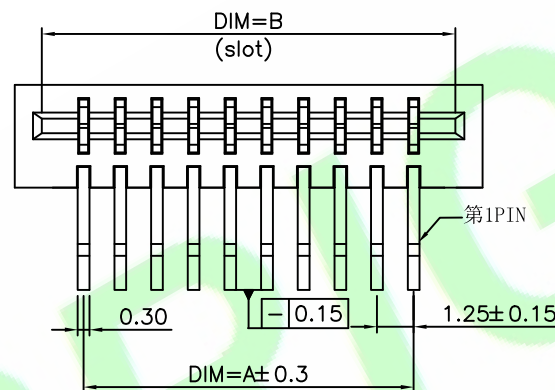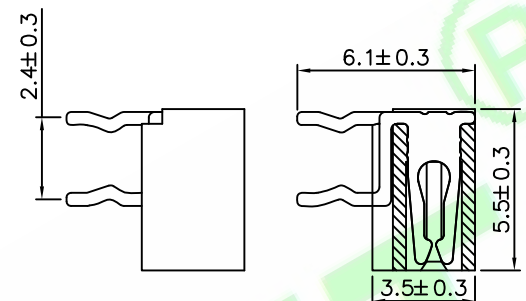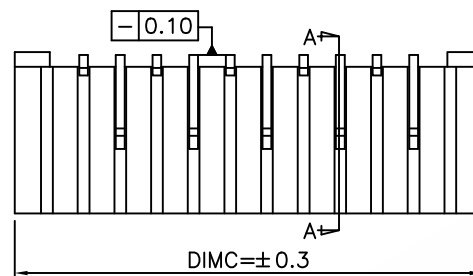


PC BOARD LAYOUT

Circuits	Dimensions		
	Dim A	Dim B	Dim C
04	3.75	6.50	8.45
05	5.00	7.75	9.70
06	6.25	9.00	10.95
07	7.50	10.25	12.20
08	8.75	11.50	13.45
09	10.00	12.75	14.70
10	11.25	14.00	15.95
11	12.50	15.25	17.20
12	13.75	16.50	18.45
13	15.00	17.25	19.70
14	16.25	19.00	20.95
15	17.50	20.25	22.20
16	18.75	21.50	23.45
17	20.00	22.75	24.70
18	21.25	24.00	25.95
19	22.50	25.25	27.20
20	23.75	26.50	28.45
21	25.00	27.75	29.70
22	26.25	29.00	30.95
23	27.50	30.25	32.20
24	28.75	31.50	33.45
25	30.00	32.75	34.70
26	31.25	34.00	35.95
27	32.50	35.25	37.20
28	33.75	36.50	38.45
29	35.00	37.75	39.70
30	36.25	39.00	40.95
31	37.50	40.25	42.20
32	38.75	41.50	43.45
33	40.00	42.75	44.70

2X	Add Packaging Method	Tony.Zou	20240724
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : F1250R-XXX-01-XX
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	x.: ±0.30	x': ±5.0°	TITLE :
	x.x: ±0.25	x.x': ±3.0°	1.25弯针双面接正位
	x.xx: ±0.20	x.xx': ±2.0°	DATE: 30-Aug-2018
	x.xxx: ±0.10	x.xxx':	

HJBRIGHT® 東莞市華晶電子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	
SCALE: 1:1	
UNIT: mm	
THIRD ANGLE PROJECTION	
A4	