




Specifications:
 Material And Finish:
 Insulator:PBT UL94V-0 Color:Black
 Contact:Copper Alloy
 Shell:Zinc Alloy
 Plated:See Ordering Information

Rating:
 Current Rating:1.0 Amp
 Voltage Rating:250V AC
 Operating Temperature Range:-40°~+105°C


Electrical:
 Contact resistance: 35m Ohm Max
 Withstanding Voltage:500V AC/Minute

Ordering Information
 FCN1271S-XXFX-01-X
 1 2 3 4 5 6


- 1:— Series No.
 2:— S: Straight Type
 3:— No. of Positions
 4:— F: Female
 5:— S: Matte Tin Plated
 Q: Tin Plated
 6:— A: In Bag
 B: In Tube
 C: In Tray

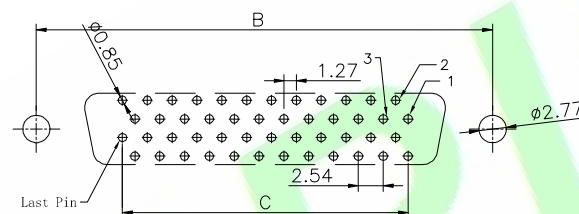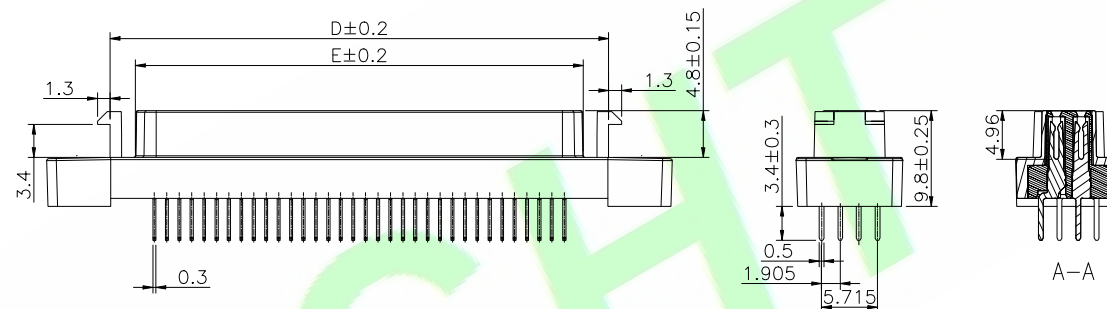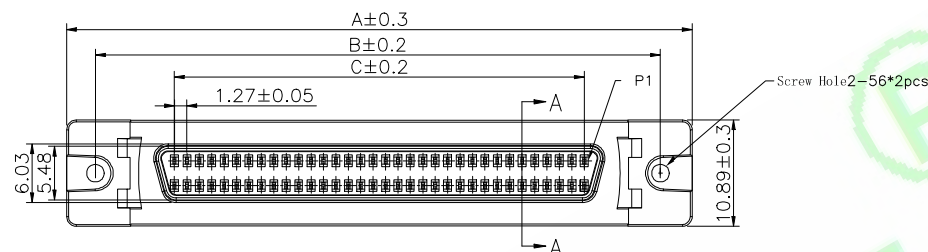


P.C.B. BOARD LAYOUT
 (68100Pin) R1 Type/ reverse side foot position

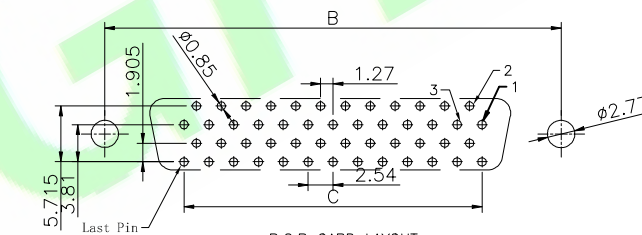

P.C.B. BOARD LAYOUT
 (50Pin) R1 Type/ reverse side foot position

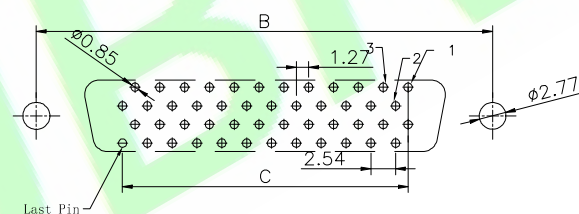

P.C.B. BOARD LAYOUT
 (68100Pin) R2 Type/ reverse side foot position

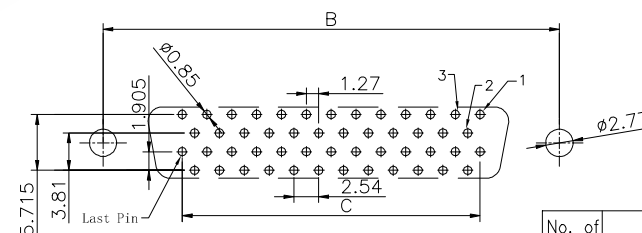

P.C.B. BOARD LAYOUT
 (50Pin) R2 Type/ reverse side foot position

No. of Pin	DIMENSIONS				
	A	B	C	D	E
50	52.55	46.37	30.48	39.57	34.35
68	64.00	57.77	41.91	51.00	45.78
100	84.30	78.12	62.23	71.32	66.10

DR.BY.: Bin	GENERAL TOLERANCE:		PART NO : FCN1271S-XXFX-01-X	
CHKD.: Judyyan	LINEAR		DWG. NO.:	
	X.: ±0.38	X': ±2.0°	TITLE : SCSI Female Socket 180 Degree DB Type (50P/68P/100P)	
	X.X: ±0.35	X.X': ±1.0°		
	X.XX: ±0.25	X.XX': ±0.5°		
APPD.: Billy	X.XXX: ±0.15	X.XXX': ±0.1°	DATE: 26-Dec-2023	

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E TECHNOLOGY ELECTRONIC LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGNINAL	Bin	
REV.	DESCRIPTION	DR.BY	ECN. NO.