

Specifications:

Material And Finish:

Shell :Steel Zinc Plated,Tin Plated or Nickel Plated Steel

PIN Contact:Phosphor Bronze or Brass Gold Plated

Insulator:PBT & Glass-Fibre Reinforced UL-94-V0

Rating:

Current Rating:5 Amps


Operating Temperature Range:-55°~+105°C

Dielectric Strength:1000V for one Minute

Electrical:

Contact Resistance:25 Milliohms MAX

Insulator Resistance:1000 Megohms Minimum.at DC 500V

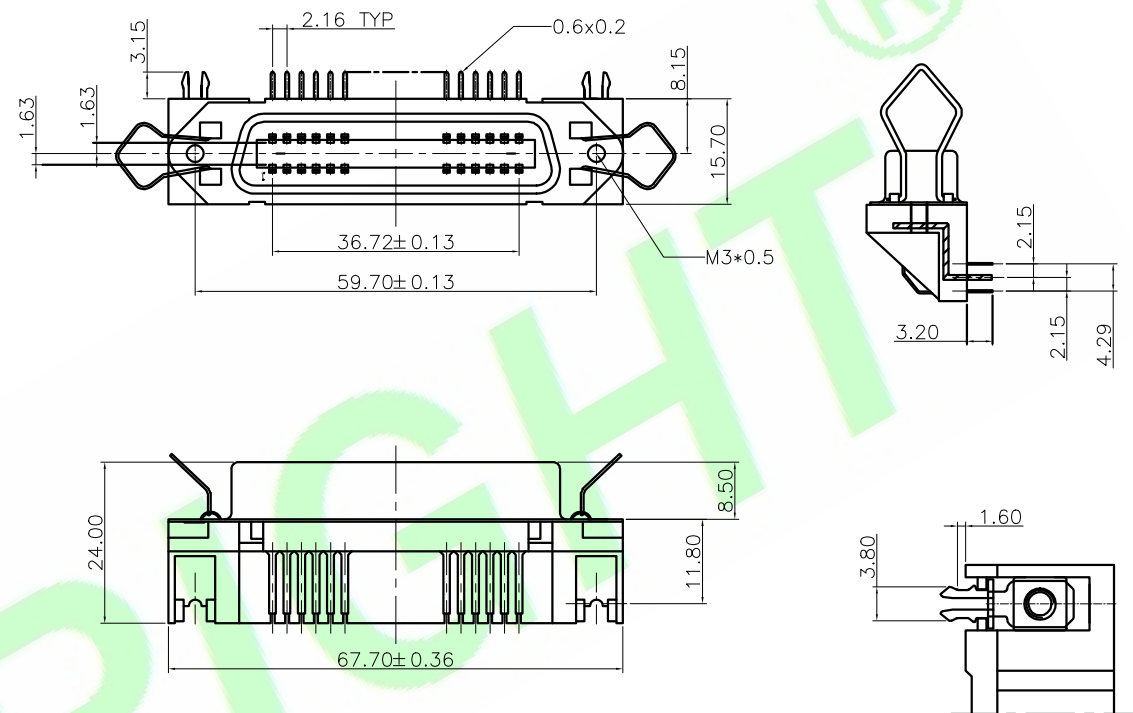

Ordering Information

FCN2160R-36A-01-X
1 2 3 4 5

1:— Series No.

2:— R:R/A Type

3:— No. of Positions

4:— A:Gold flash

5:— B :In Tube

C :In Tray

PCB Layout

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : FCN2160R-36A-01-X	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	x.: ±0.38	x': ±2.0°	TITLE : Female Connector With a 90-Degree Angle, CN Type	
	x.x: ±0.35	x.x': ±1.0°		
APPD.: Billy	x.xx: ±0.25	x.xx': ±0.5°	DATE: 30-Dec-2020	
	x.xxx: ±0.15	x.xxx':		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO