

Specifications:

1. Cover film: Polyimide(25μm)
2. Thermosetting adhesive
3. Conductor: Copper foil(18μm)
4. Thermosetting Adhesive
5. Base film: Polyimide((25μm)
6. Thermosetting Adhesive
7. Stiffener: Polyimide

Rating:


Current Rating:0.5 Amp  
 Voltage Rating:50V AC/DC  
 Operating Temperature Range:-40°~+150°C  
 Electrical:  
 Contact resistance:20m Ohm Max  
 Insulator resistance:500M ohm min.  
 Withstanding Voltage:200V AC/Minute

Ordering Information

FFC1015-05A-030-A  
 1 2 3 4 5 6

- 1: — Series No.
- 2: — Pipelining code
- 3: — No. of Positions
- 4: — A:Gold flash
- 5: — length: 030=30mm
- 6: — A:On the same side

\*Available in 4 through 30 circuits

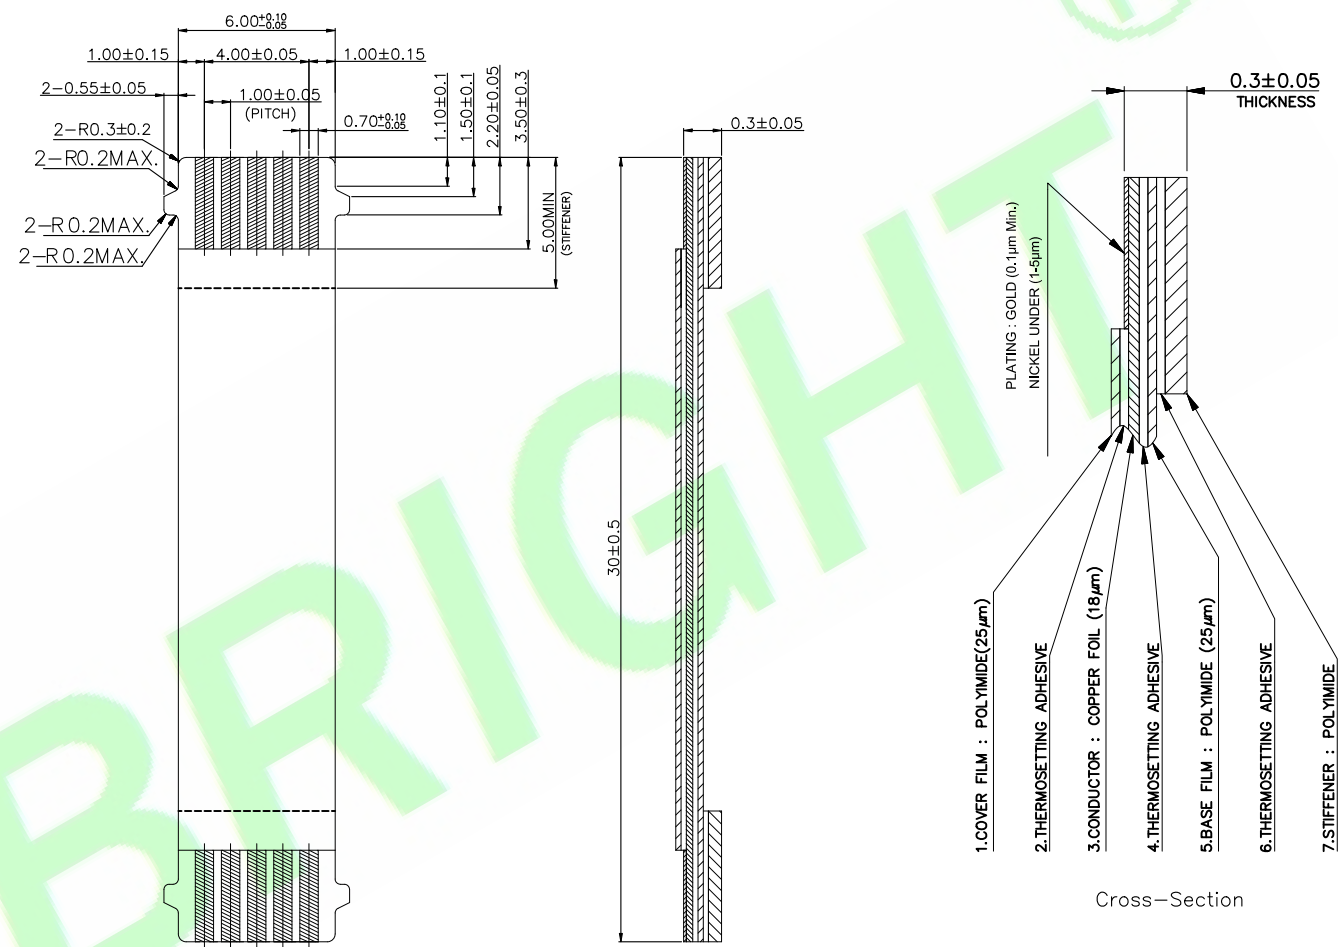

Cross-Section

DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : FFC1015-05A-030-A	
CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:	
	x.: ±	x':	TITLE :	
APPD.: Billy	x.x: ±0.15	x.x': ±1°	1.0mm ZIF FFC/FPC 5PIN L=30mm	
	x.xx: ±0.10	x.xx':	DATE: 29-Dec-2022	
	x.xxx: ±0.05	x.xxx':		

**HJBRIGHT**® 东莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
 SCALE: 1:1  
 UNIT: mm

THIRD ANGLE PROJECTION

**A4**

1X	ORIGINAL	Judyyan	
REV	DESCRIPTION	DR.BY	ECN. NO.