

RoHS Compliant

Specifications:
 Conductor:Material:Copper
 Thickness:0.10mm nominal (Standard)
 Insulation tape:Material:Polyester + Flame retardant adhesive
 Thickness: 0.086mm nominal
 Color:White
 Reinforcement tape: Material: Polyester + Adhesive
 Thickness: 0.15 nominal



Rating:
 Current Rating:0.5 Amp
 Voltage Rating:50V AC/DC
 Operating Temperature Range:-40°~+105°C

Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:200V AC/Minute

Ordering Information
 FFC1015-XXA-XXX-B
 1 2 3 4 5 6

- 1:— Series No.
- 2:— Pipelining code
- 3:— No. of Positions
- 4:— A:Gold flash
S:Matte Tin Plated
- 5:— length: 030=30mm
- 6:— B: Not in the same way

*Available in 4 through 30 circuits

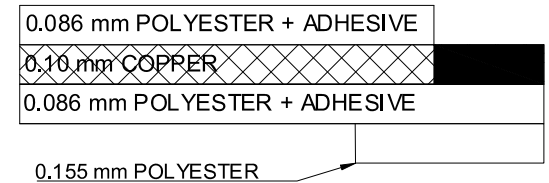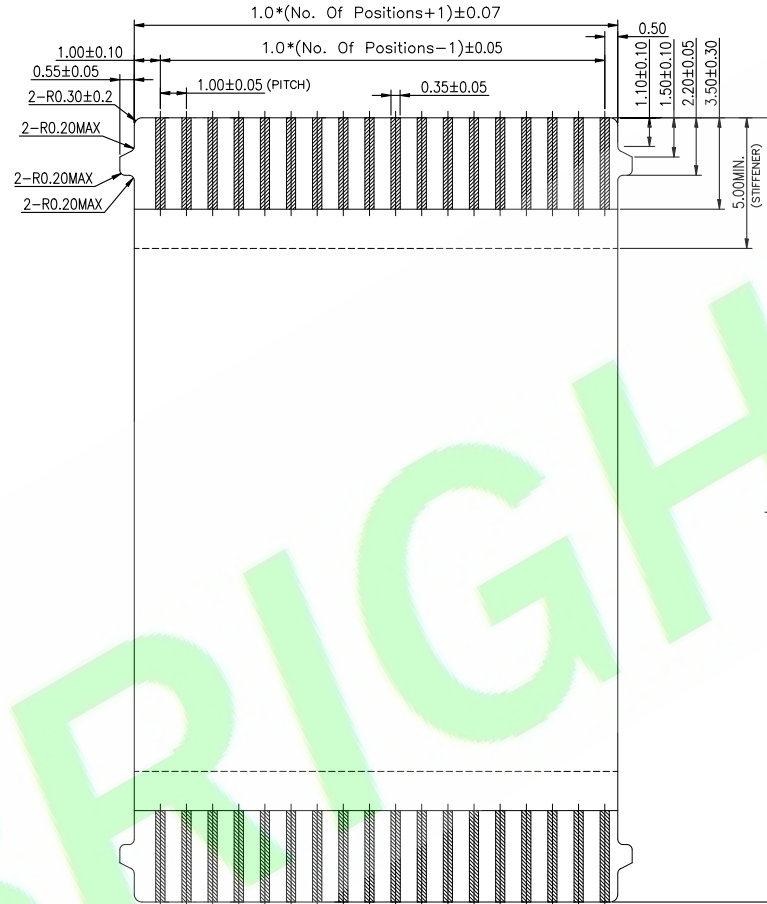


CROSS-SECTION

DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : FFC1015-XXA-XXX-B	
CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:	
	X.: ±	X':	TITLE :	
	X.X: ±0.15	X.X': ±1°	1.0mm ZIF FFC/FPC	
	X.XX: ±0.10	X.XX':	DATE: 29-Dec-2022	
APPD.: Billy	X.XXX: ±0.05	X.XXX':		

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV	DESCRIPTION	DR.BY	ECN. NO