




Specifications:

Conductor:Material:Copper  
 Thickness:0.10mm nominal (Standard)  
 Insulation tape:Material:Polyester + Flame retardant adhesive  
 Thickness: 0.086mm nominal  
 Color:White  
 Reinforcement tape: Material: Polyester + Adhesive  
 Thickness: 0.15 nominal

Rating:  
 Current Rating:0.5 Amp  
 Voltage Rating:50V AC/DC  
 Operating Temperature Range:-40~+125°C  
 Electrical:  
 Contact resistance:20m Ohm Max  
 Insulator resistance:500M ohm min.  
 Withstanding Voltage:200V AC/Minute

Ordering Information  
 FFC1025-07A-125-A  
 1 2 3 4 5 6

- 1: — Series No.
- 2: — Pipelining code
- 3: — No. of Positions
- 4: — A:Gold flash  
S:Matte Tin Plated
- 5: — length: 125=125mm
- 6: — A:On the same side

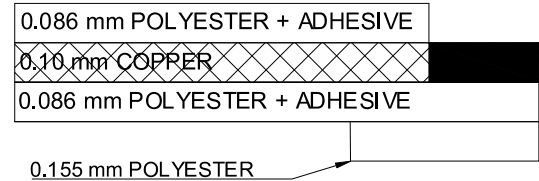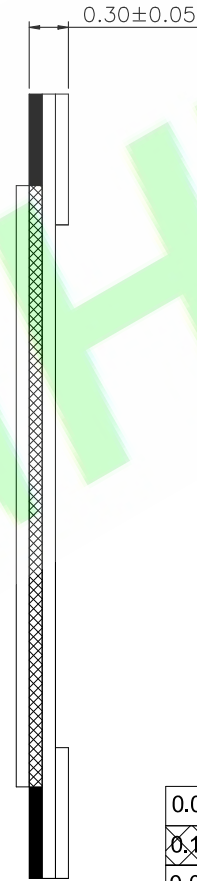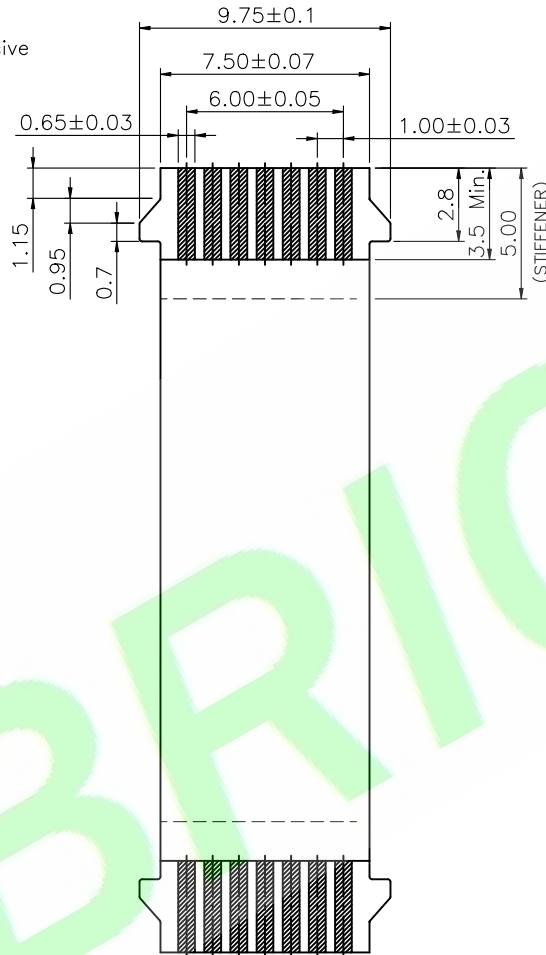


CROSS-SECTION

DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : FFC1025-07A-125-A	
CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:	
	x.: ±	x':	TITLE :	
	x.x: ±0.15	x.x': ±1°	1.0mm ZIF FFC/FPC 7PIN	
	x.xx: ±0.10	x.xx':	DATE: 29-Dec-2022	
APPD.: Billy	x.xxx: ±0.05	x.xxx':		

**HJBRIGHT**® 东莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
 SCALE: 1:1  
 UNIT: mm



A4

1X	ORIGINAL	Judyyan	
REV	DESCRIPTION	DR.BY	ECN. NO