
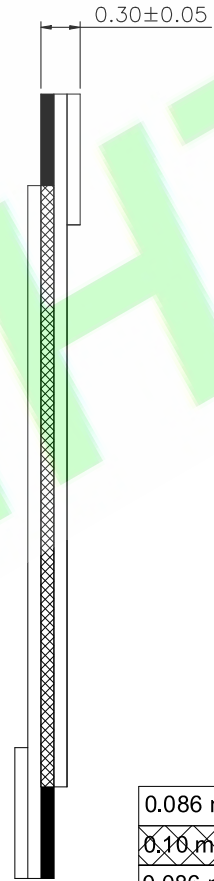


Specifications:
 Conductor:Material:Copper
 Thickness:0.10mm nominal (Standard)
 Insulation tape:Material:Polyester + Flame retardant adhesive
 Thickness: 0.086mm nominal
 Color:White
 Reinforcement tape: Material: Polyester + Adhesive
 Thickness: 0.15 nominal
 Rating:
 Current Rating:0.5 Amp
 Voltage Rating:50V AC/DC
 Operating Temperature Range:-40°~+105°C
 Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:200V AC/Minute

Ordering Information
 FFC1025-07A-125-B
 1 2 3 4 5 6

- 1:— Series No.
- 2:— Pipelining code
- 3:— No. of Positions
- 4:— A:Gold flash
S:Matte Tin Plated
- 5:— length: 125=125mm
- 6:— B: Not in the same way

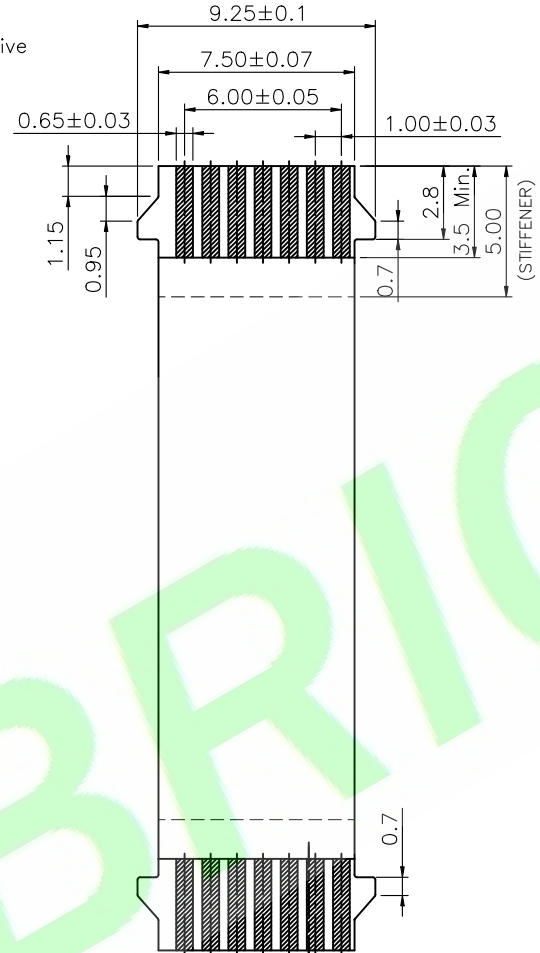


| |
|-------------------------------|
| 0.086 mm POLYESTER + ADHESIVE |
| 0.10 mm COPPER |
| 0.086 mm POLYESTER + ADHESIVE |
| 0.155 mm POLYESTER |

CROSS-SECTION

| | | | | |
|-----------------|--------------------|-----------|-----------------------------|--|
| DR.BY.: Aren | GENERAL TOLERANCE: | | PART NO : FFC1025-07A-125-B | |
| CHKD.: Aren | LINEAR | ANGLES | DWG. NO.: | |
| | x.: ± | x': | TITLE : | |
| APPD.: Billy | x.x: ±0.15 | x.x': ±1° | 1.0mm ZIF FFC/FPC 7PIN | |
| | x.xx: ±0.10 | x.xx': | DATE: 29-Dec-2022 | |
| | x.xxx: ±0.05 | x.xxx': | | |

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



A4

| | | | |
|-----|-------------|---------|---------|
| 1X | ORIGINAL | Judyyan | |
| REV | DESCRIPTION | DR.BY | ECN. NO |