

Specifications:
 Conductor:Material:Copper
 Thickness:0.10mm nominal (Standard)
 Insulation tape:Material:Polyester + Flame retardant adhesive
 Thickness: 0.086mm nominal
 Color:White
 Reinforcement tape: Material: Polyester + Adhesive
 Thickness: 0.15 nominal



Rating:
 Current Rating:0.5 Amp
 Voltage Rating:50V AC/DC
 Operating Temperature Range:-40~+125°C

Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:200V AC/Minute

Ordering Information
 FFC1025-XXA-XXX-A
 1 2 3 4 5 6

- 1:— Series No.
- 2:— Pipelining code
- 3:— No. of Positions
- 4:— A:Gold flash
S:Matte Tin Plated
- 5:— length: 030=30mm
- 6:— A:On the same side

DIM.A=1.0 X (No. of Spaces-1)
 DIM.B=DIM.A + 5.1
 DIM.C=DIM.A + 1.6
 DIM.D=DIM.A + 2.0
 DIM.E=DIM.A + 3.75
 *Available in 5 through 80 circuits

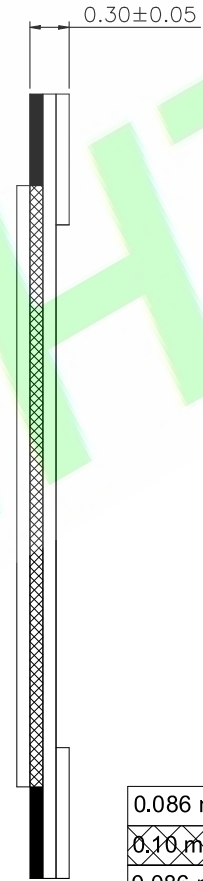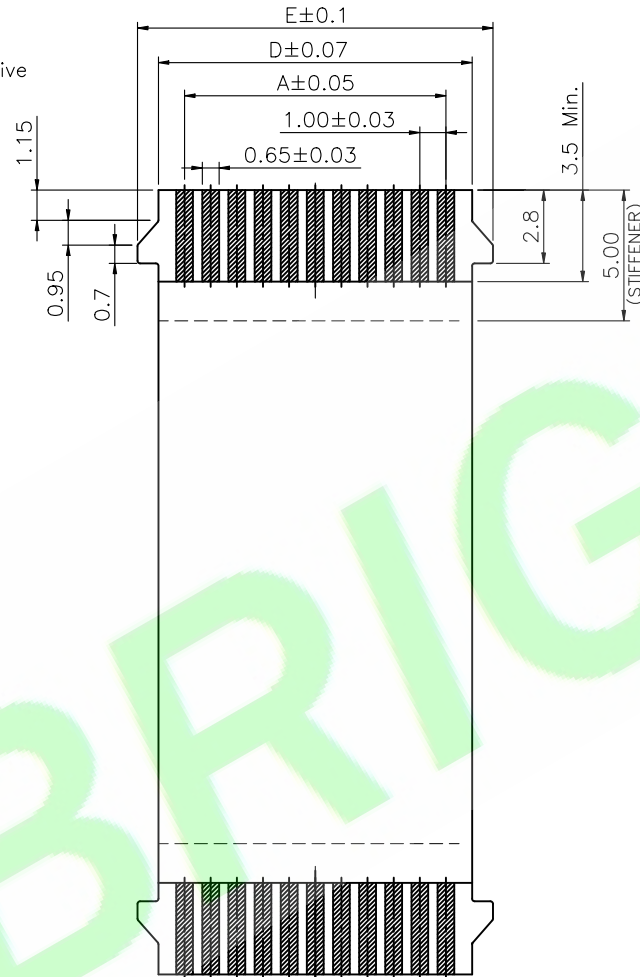

0.086 mm POLYESTER + ADHESIVE
 0.10 mm COPPER
 0.086 mm POLYESTER + ADHESIVE

0.155 mm POLYESTER

CROSS-SECTION

DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : FFC1025-XXA-XXX-A	
CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:	
	x.: ±	x':	TITLE :	
APPD.: Billy	x.x: ±0.15	x.x': ±1°	1.0mm ZIF FFC/FPC	
	x.xx: ±0.10	x.xx':	DATE: 29-Dec-2022	
	x.xxx: ±0.05	x.xxx':		

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV	DESCRIPTION	DR.BY	ECN. NO