

Specifications:  
 Conductor:Material:Copper  
 Thickness:0.10mm nominal (Standard)  
 Insulation tape:Material:Polyester + Flame retardant adhesive  
 Thickness: 0.086mm nominal  
 Color:White  
 Reinforcement tape: Material: Polyester + Adhesive  
 Thickness: 0.15 nominal


Rating:  
 Current Rating:0.5 Amp  
 Voltage Rating:50V AC/DC  
 Operating Temperature Range:-40~+105°C

Electrical:  
 Contact resistance:20m Ohm Max  
 Insulator resistance:500M ohm min.  
 Withstanding Voltage:200V AC/Minute

Ordering Information  
 FFC1025-XXA-XXX-B  
 1 2 3 4 5 6

- 1:— Series No.
- 2:— Pipelining code
- 3:— No. of Positions
- 4:— A:Gold flash  
S:Matte Tin Plated
- 5:— length: 030=30mm
- 6:— B: Not in the same way

DIM.A=1.0 X (No. of Spaces-1)  
 DIM.B=DIM.A + 5.1  
 DIM.C=DIM.A + 1.6  
 DIM.D=DIM.A + 1.5  
 DIM.E=DIM.A + 3.25  
 \*Available in 5 through 80 circuits

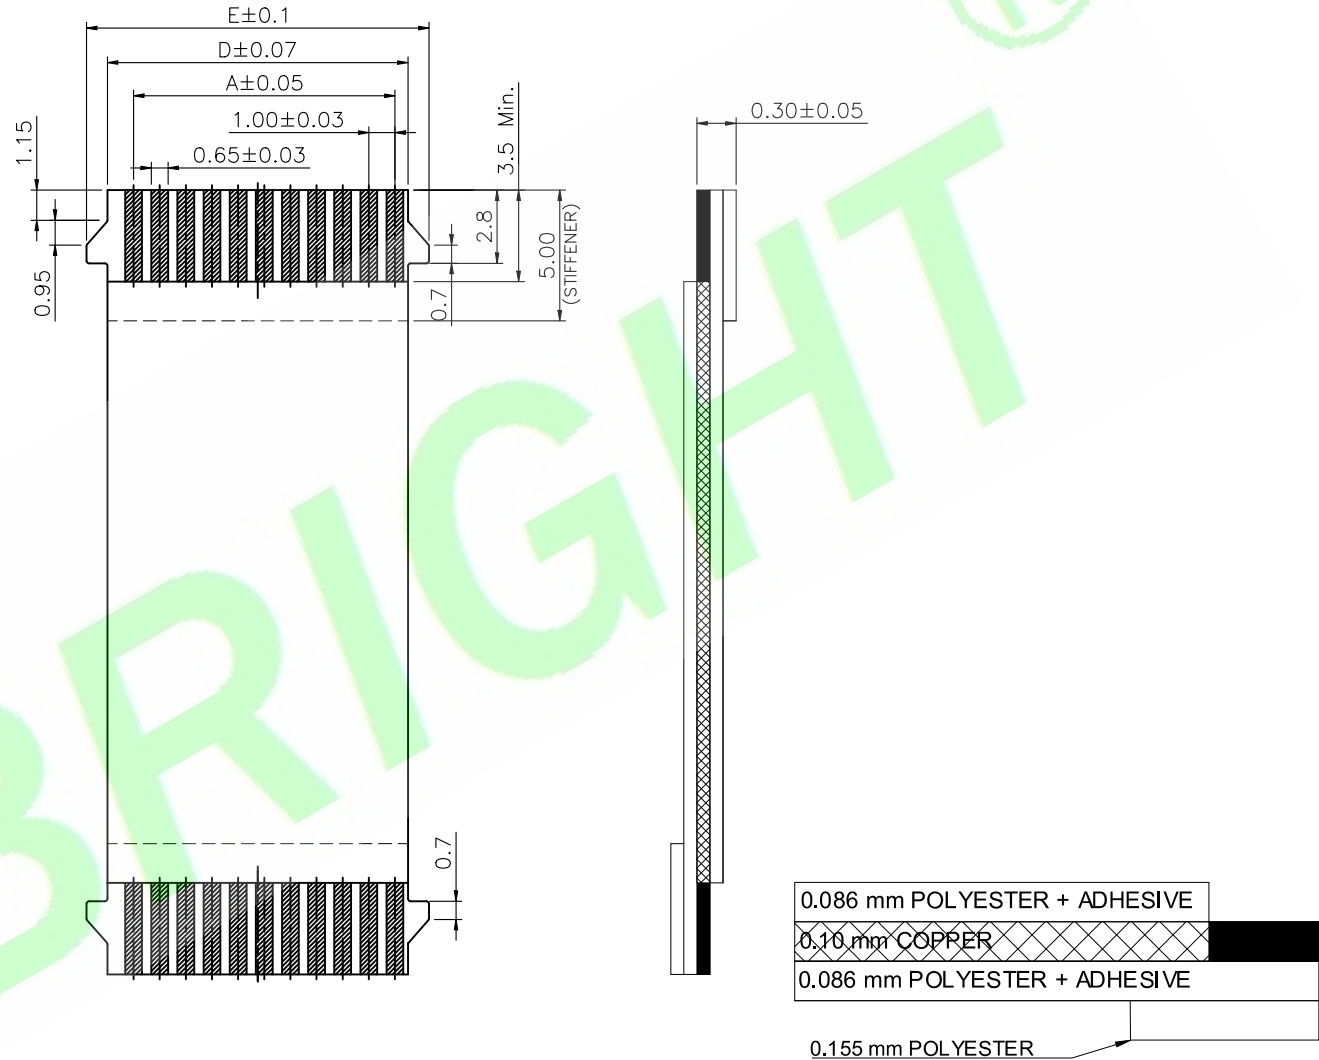

CROSS-SECTION

DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : FFC1025-XXA-XXX-B		<b>HJBRIGHT</b> ® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:		
APPD.: Billy	X.: ±	X':	TITLE :		SHEET: 1/1
	X.X: ±0.15	X.X': ±1°	1.0mm ZIF FFC/FPC		SCALE: 1:1
	X.XX: ±0.10	X.XX':	DATE: 29-Dec-2022		UNIT: mm
	X.XXX: ±0.05	X.XXX':			THIRD ANGLE PROJECTION

1X	ORIGINAL	Judyyan	
REV	DESCRIPTION	DR.BY	ECN. NO

A4