

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA46,UL94V-0 Color:Natural

Contact:Phosphorous copper C5191

Plated:See Ordering Information

Rating:

Current Rating:0.5 Amp

Voltage Rating:30V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:200V AC/Minute

Ordering Information

H0801-XXX-A

1 2 3 4






1:— Series No.

2:— No. of Positions




3:— A:Gold Flash

Q:Tin Plated

4:— A:In Bag

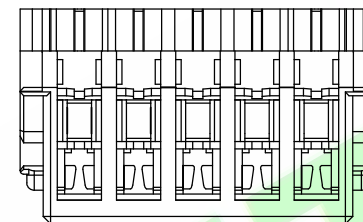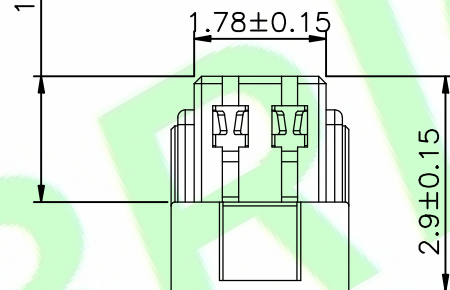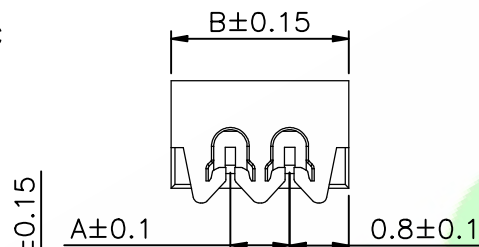

05P

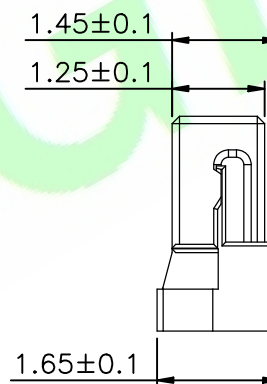


Circuits	Dimension mm	
	A	B
2	0.80	2.40
3	1.60	3.20
4	2.40	4.00
5	3.20	4.80
6	4.00	5.60
8	5.60	7.20
10	7.20	8.80
12	8.80	10.40
14	10.40	12.00
15	11.20	12.80
16	12.00	13.60
17	12.80	14.40
20	15.20	16.80
22	16.80	18.40

4X	Recovery material: PA46	Judyyan	20240903
3X	Update materia	Wu	20231213
2X	Update code options	Judyyan	20220808
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X°: ±5.0°
X.X: ±0.20	X.X°: ±3.0°
X.XX: ±0.15	X.XX°: ±2.0°
X.XXX: ±0.10	X.XXX°: ±1.0°

PART NO : H0801-XXX-A
DWG. NO.: RD0806-301
TITLE : 0.8mm Pitch Clip Housing H:2.90 W:1.65
DATE: 02-Jun-2008

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		