

Specifications:
Material And Finish:
Insulator:LCP UL94V-0 Color:Black

Rating:
Current Rating:1.2 Amp Max
Voltage Rating:30V AC/DC
Operating Temperature Range:-40°~+105°C






Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:200V AC/Minute

Ordering Information

H0802-XXP-01-A

1 2 3

- 1:— Series No.
2:— No. of Positions
3:— A:In Bag

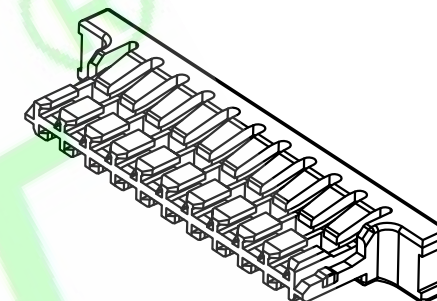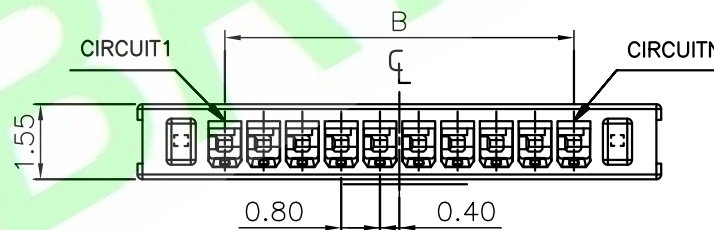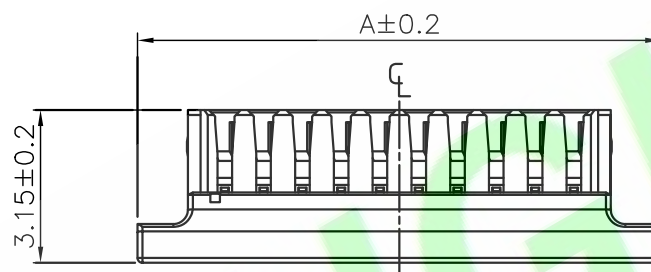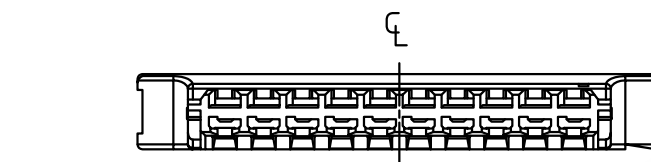

Circuit No	Dimensions	
	A	B
2P	4.4	0.8
3P	5.2	1.6
4P	6.0	2.4
5P	6.8	3.2
6P	7.6	4.0
7P	8.4	4.8
8P	9.2	5.6
9P	10.0	6.4
10P	10.8	7.2
11P	11.6	8.0
12P	12.4	8.8
13P	13.2	9.6
14P	14.0	10.4
15P	14.8	11.2
16P	15.6	12.0
17P	16.4	12.8
18P	17.2	13.6
19P	18.0	14.4
20P	18.8	15.2

DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : H0802-XXP-01-A	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE :	
	x.x: ±0.20	x.x': ±3.0°	0.8mm Pitch Housing	
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 15-Jan-2024	
	x.xxx: ±0.10	x.xxx': ±1.0°		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Zolin	
REV.	DESCRIPTION	DR.BY	ECN. NO