

Specifications:

Terminal: Copper alloy
Wire Range: AWG#8~16

Rating:

Current Rating: AWG#8 50A AC/DC
AWG#10 40A AC/DC
AWG#12 32A AC/DC






Electrical:

Contact resistance: 3.0m Ohm Max

Ordering Information**H10001TM-PX**

1 23 4

- 1: — Series No.
2: — T: Terminal
3: — M: Male Terminal
4: — H: Selective Gold Plated
Q: Tin Plated
A2: 30u" Gold on contact; Tin on tail

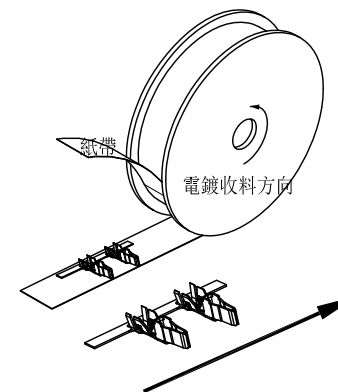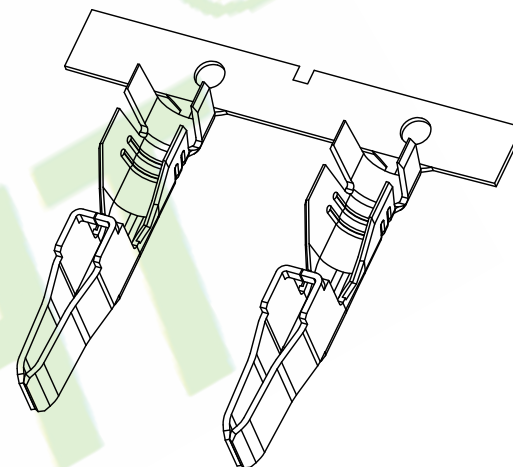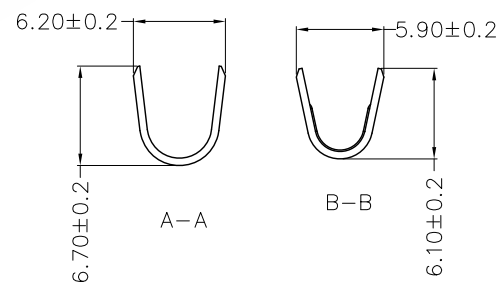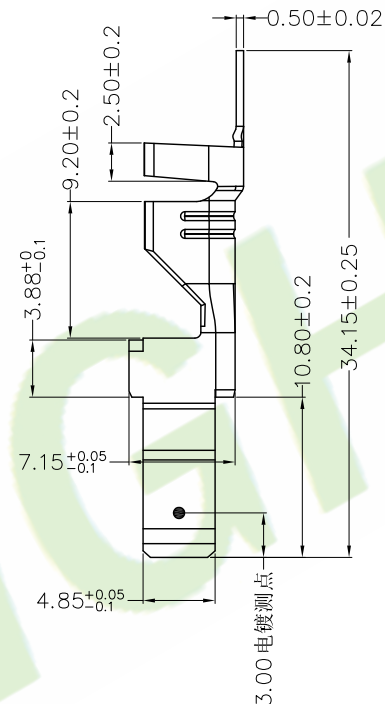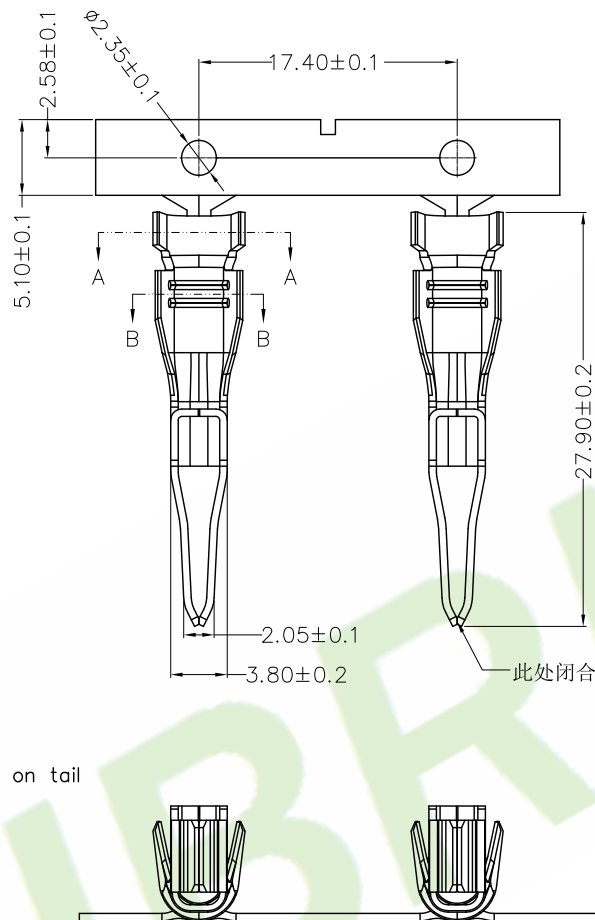

5X			
4X			
3X			
2X	Revised drawing annotation	Judyyan	20220715
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Mark
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.15	X': ±5.0°
X.X: ±0.10	X.X': ±3.0°
X.XX: ±0.05	X.XX': ±2.0°
X.XXX:	X.XXX': ±1.0°

PART NO : H10001TM-PX

DWG. NO.:

TITLE :

10.0mm Pitch male Terminal

DATE: 04-Jun-2021

HJBRIGHT® 东莞市华晶电子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4