

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0,Color:Natural

Shell:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:200V AC/DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute





Ordering Information

H1007-XXP-A
1 3 2

1:— Series No.

2:— H:Housing

3:— No. of Positions

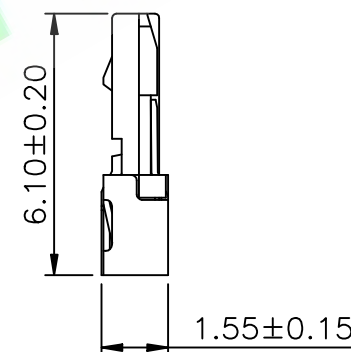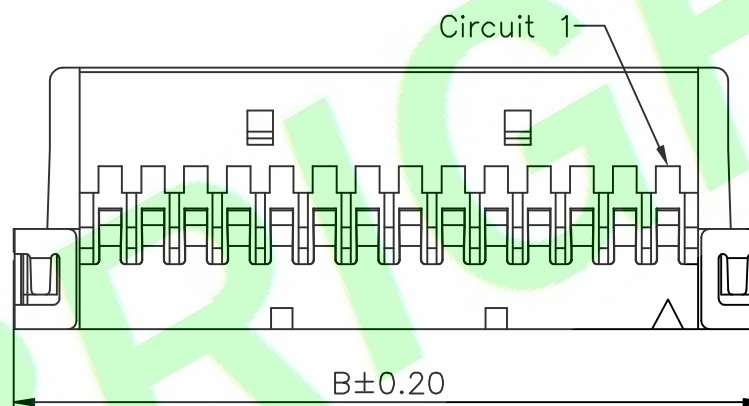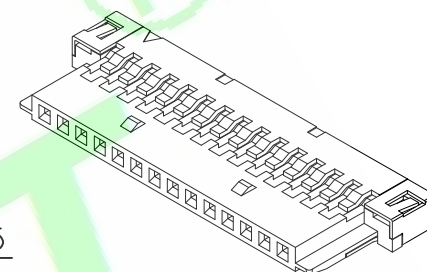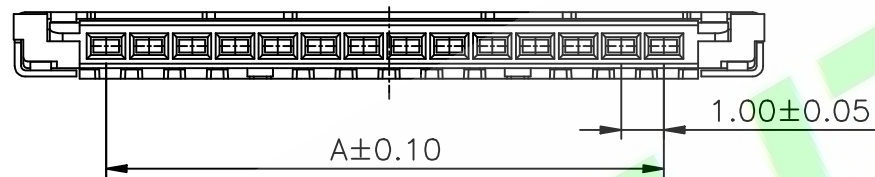

Circuits	Dimensions	
	A	B
08	7.00	11.50
14	13.00	17.50
20	19.00	23.50
30	29.00	33.50

1X	Update code option	Judyyan	20221105
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H1007-XXP-A
	LINEAR	ANGLES	
	X.: ±5.0°	X.X: ±0.30	BURY P/N:
	X.XX: ±0.20	X.XX: ±0.10	
CHKD.: Tony	X.XX: ±0.20	X.XX: ±0.20	TITLE : 1.0mm Pitch Housing
APPD.: Billy	X.XXX: ±0.10	X.XXX: ±1.0°	
			DATE: 21-Oct-2017

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4