

Specifications:
Material And Finish:
Insulator:PA66,UL94V-0,Color:Natural

Rating:
Current Rating:1.0 Amp
Voltage Rating:50V AC/DC
Operating Temperature Range:-25°C~+85°C






Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information

H1009-XXP-A

1 2 3

- 1:—Series No.
2:—No. of Positions
3:—A:In Bag

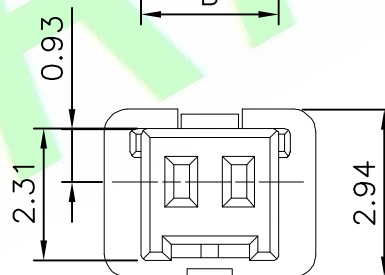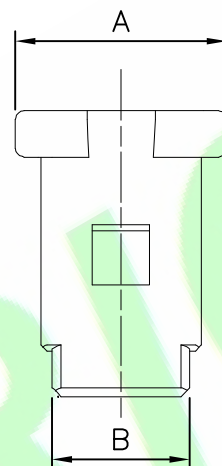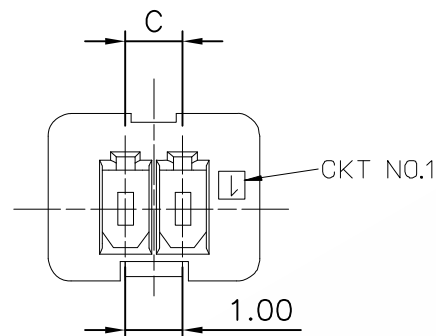

Dimensional & Ordering Information:

Circuits	Dimension		
	A	B	C
5	6.7	5.4	4.0
4	5.7	4.4	3.0
3	4.7	3.4	2.0
2	3.7	2.4	1.0

5X			
4X			
3X			
2X	Update Code options	Judyyan	20221015
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±0.30
X.X: ±3.0°	X.XX: ±0.20
X.XX: ±2.0°	X.XXX: ±0.10
X.XXX: ±1.0°	

PART NO : H1009-XXP-A

BURY P/N:

TITLE :

1.0mm Pitch Housing

DATE: 05-Oct-2017

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4