





Specifications:
Material And Finish:
Insulator:Nylon66/PBT UL94V-0

Rating:
Current Rating:1.5 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

Ordering Information
H1250-XXP-02-XXA
1 2 3 4 5

- 1:— Series No.
2:— No. of Positions
3:— N:PA66
P:PBT
4:— B:Black
BR:Brown
5:— A:In Bag

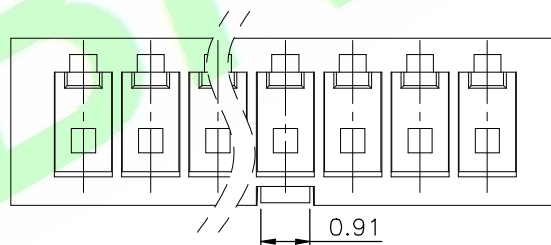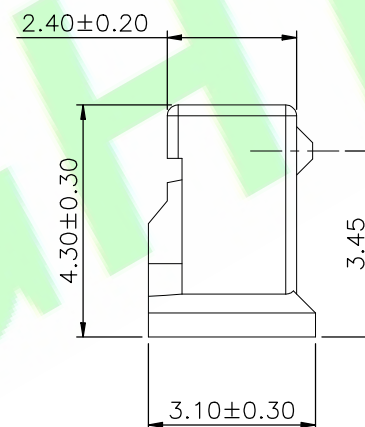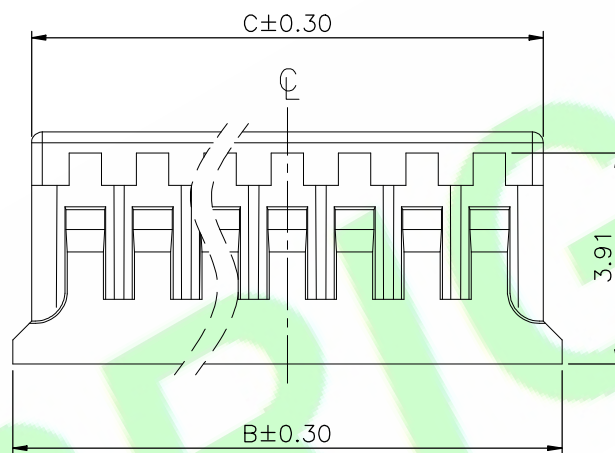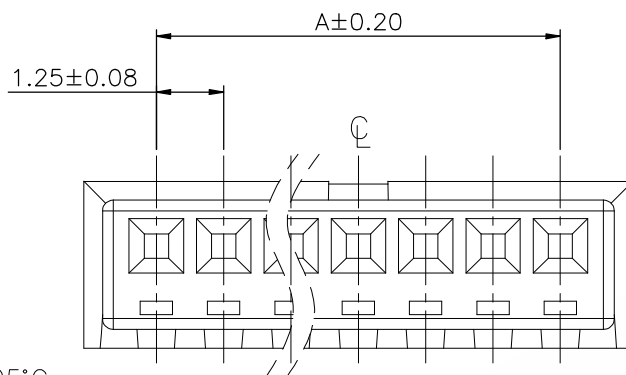

PIN No.	Dimensions		
	A	B	C
02	1.25	3.95	3.25
03	2.50	5.20	4.50
04	3.75	6.45	5.75
05	5.00	7.70	7.00
06	6.25	8.95	8.25
07	7.50	10.20	9.50
08	8.75	11.45	10.75
09	10.00	12.70	12.00
10	11.25	13.95	13.25
11	12.50	15.20	14.50
12	13.75	16.45	15.75
13	15.00	17.70	17.00
14	16.25	18.95	18.25
15	17.50	20.20	19.50

DR.BY.:
Judyyan

CHKD.:
Aaron

APPD.:
Billy

GENERAL TOLERANCE:

LINEAR

ANGLES

X.: ±2.0°

X.X: ±0.25

X.XX: ±0.13

X.XXX: ±0.05

X.X: ±2.0°

X.XX: ±2.0°

X.XXX: ±2.0°

PART NO : H1250-XXP-02-XXA

DWG. NO.:

TITLE :

1.25mm Pitch Crimp Style Housing

DATE: 19-Aug-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.