

Specifications:
Material And Finish:
Insulator: Nylon66 UL94V-0,
Color: Natural(White)





Rating:
Current Rating: 1.0 Amp
Voltage Rating: 125V AC/DC
Operating Temperature Range: -40°~+105°C

Electrical:
Contact resistance: 20m Ohm Max
Insulator resistance: 100M ohm min.
Withstanding Voltage: 250V AC/Minute


Ordering Information

H1250-XXP-A


- 1: — Series No.
2: — No. of Positions
3: — A: In Bag

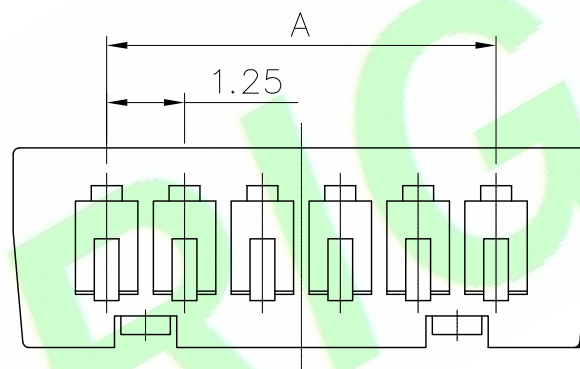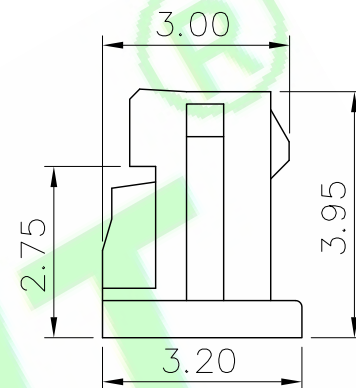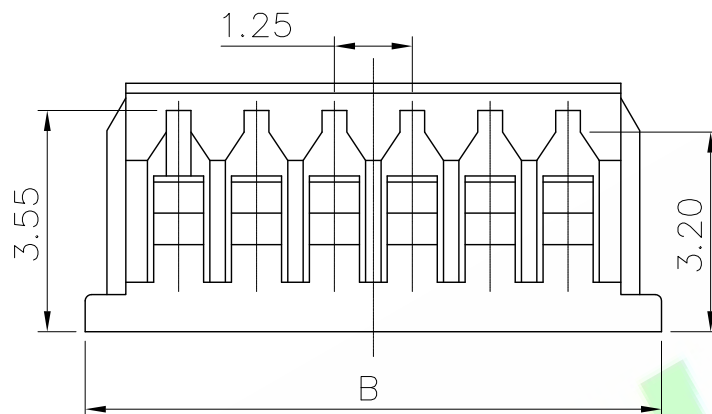

2P



3P



4P~15P

Poles	Dimensions	
	A	B
02	1.25	4.25
03	2.50	5.50
04	3.75	6.75
05	5.00	8.00
06	6.25	9.25
07	7.50	10.50
08	8.75	11.75
09	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

5X			
4X			
3X			
2X	Update code options	Judyyan	20220810
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Bruce
CHKD.:	Aaron
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±0.25	X: ±2.0°
X.X: ±0.13	X.X: ±2.0°
X.XX: ±0.05	X.XX: ±2.0°

PART NO : H1250-XXP-A

DWG. NO.:

TITLE :

1.25mm Pitch Crimp Style Housing


DATE: 21-Oct-2017

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4