

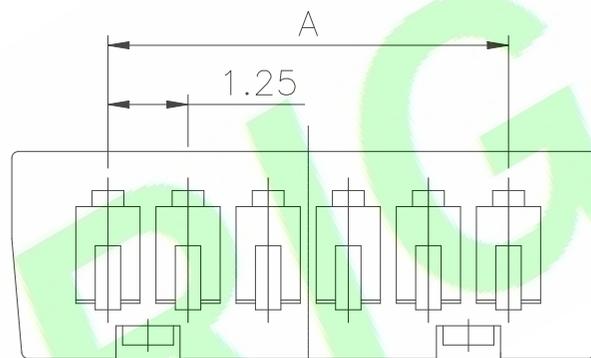



Specifications:  
 Material And Finish:  
 Insulator:Nylon66 UL94V-0,  
 Color:Natural(White)

Rating:  
 Current Rating:1.0 Amp  
 Voltage Rating:125V AC/DC  
 Operating Temperature Range:-40°~+105°C


Electrical:  
 Contact resistance:20m Ohm Max  
 Insulator resistance:100M ohm min.  
 Withstanding Voltage:250V AC/Minute

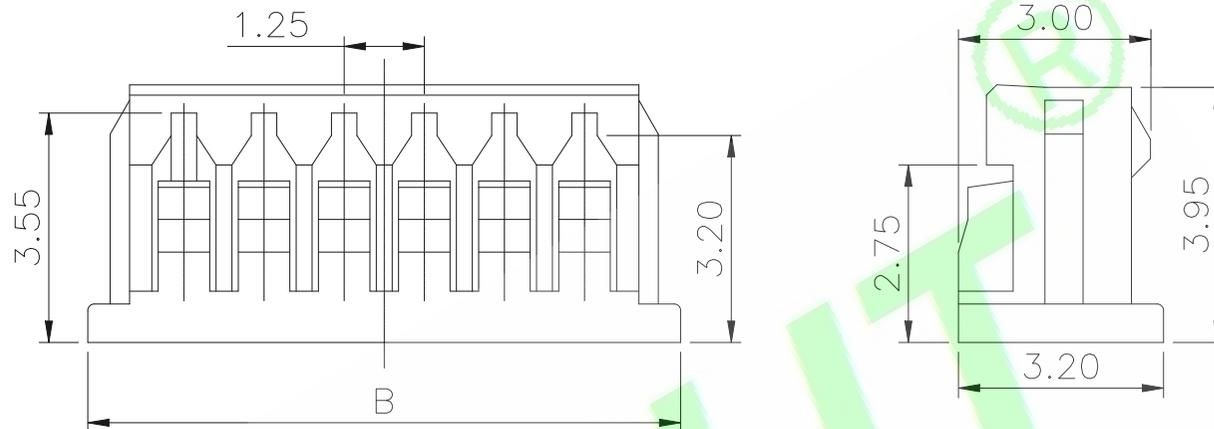

2P



3P



4P~15P

Ordering Information

H1250-XXP-XA  
 1 2 3 4

- 1: — Series No.
- 2: — No. of Positions
- 3: — N:Nature  
 B:Black
- 4: — A:In Bag

Dimensions		A	B
		1.25	4.25
2.50	5.50		
3.75	6.75		
5.00	8.00		
6.25	9.25		
7.50	10.50		
8.75	11.75		
10.00	13.00		
11.25	14.25		
12.50	15.50		
13.75	16.75		
15.00	18.00		
16.25	19.25		
17.50	20.50		

5X				DR.BY.: Bruce
4X				
3X	Update code options	Yawen	20260114	CHKD.: Aaron
2X	Update code options	Judyyan	20220810	
1X	ORIGINAL	Bruce		APPD.: Billy
REV.	DESCRIPTION	DR.BY	ECN. NO	

GENERAL TOLERANCE:	
LINEAR	ANGLES
x.: ±0.25	x': ±2.0°
x.xx: ±0.13	x.xx': ±2.0°
x.xxx: ±0.05	x.xxx': ±2.0°

PART NO : H1250-XXP-XA
DWG. NO.:
TITLE : 1.25mm Pitch Crimp Style Housing
DATE: 21-Oct-2017

**HJBRIGHT** 東莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
 SCALE: 1:1  
 UNIT: mm

THIRD ANGLE PROJECTION

**A4**