

Specifications:

Material and Finish :

Insulator:Nylon66 UL94V-0 Color:White/Black

Rating:

Current Rating:1.0 Amp AC/DC

Voltage Rating:150V AC/DC





Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

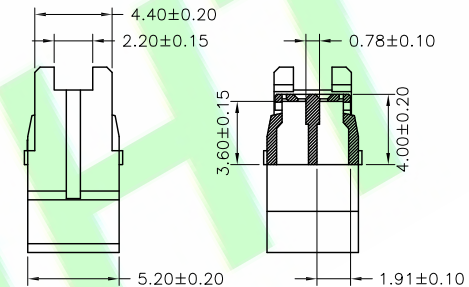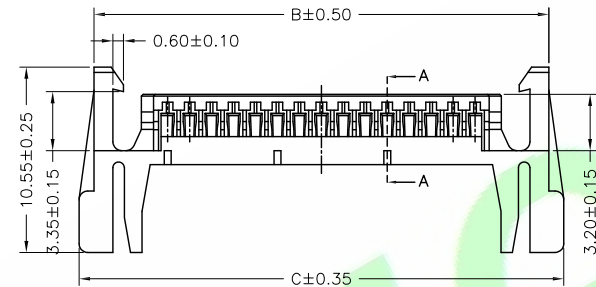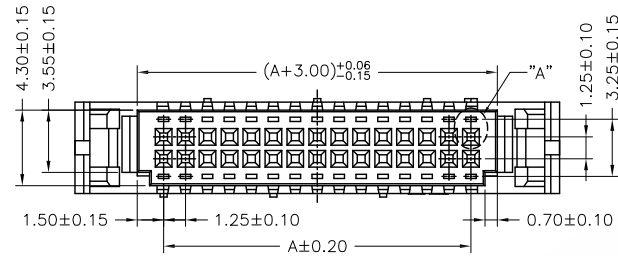



SEC:A-A

Ordering Information


H12501-XXP-01-XA

1 2 3 4 5

- 1: — Series No.
2: — No. of Positions
3: — 01: A Type
4: — W:White
B:Black
5: — A: In bag

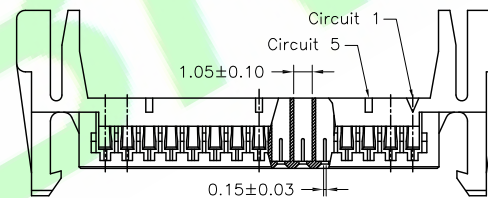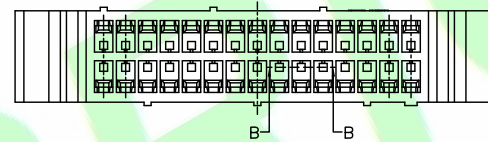

SEC:B-B

DETAIL "A"
SCALE 4:1

Circuit No.	Dimensions		
	A	B	C
2X05P	5.00	13.40	15.10
2X06P	6.25	14.65	16.35
2X07P	7.50	15.90	17.60
2X10P	11.25	19.65	21.35
2X15P	17.50	25.90	27.60
2X17P	20.00	28.40	30.10
2X18P	21.25	29.65	31.35
2X20P	23.75	32.15	33.85
2X21P	25.00	33.40	35.10


5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H12501-XXP-01-XA	
4X				Deng	LINEAR		DWG. NO.:	
3X				CHKD.:	ANGLES		TITLE :	
2X				Aren	X': ±	X': REF±6°	1.25mm Pitch Crimp Style Housing	
1X		Deng	20230509	APPD.:	X.X': ±0.25	X.X': ±2.0°	DATE: 09-May-2023	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XX': ±0.15	X.XX': ±2.0°		
					X.XXX': ±0.08	X.XXX': ±2.0°		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4