

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0

Rating:

Current Rating:1.0 Amp

Voltage Rating:125V AC/DC





Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:250V AC/Minute

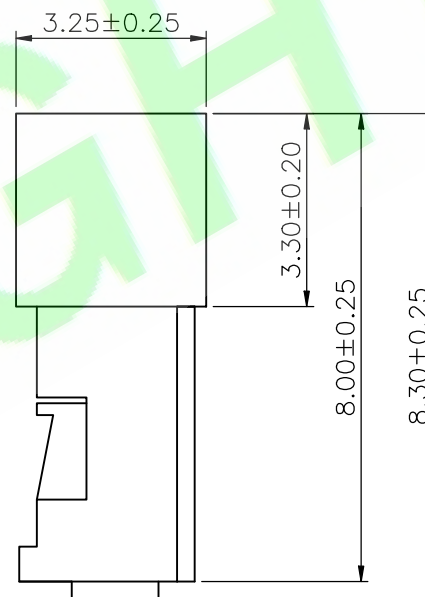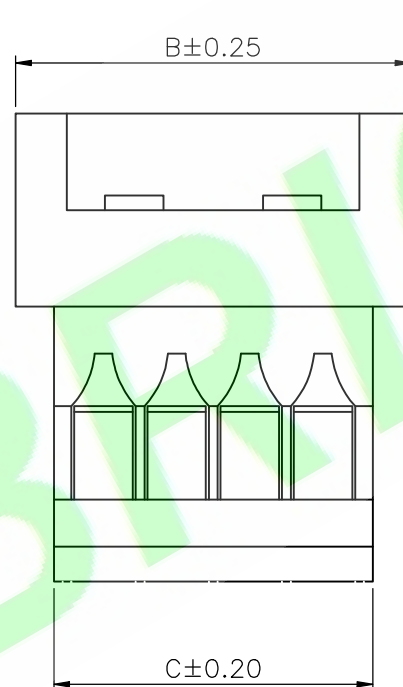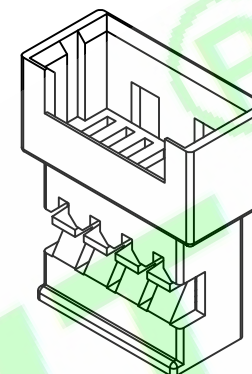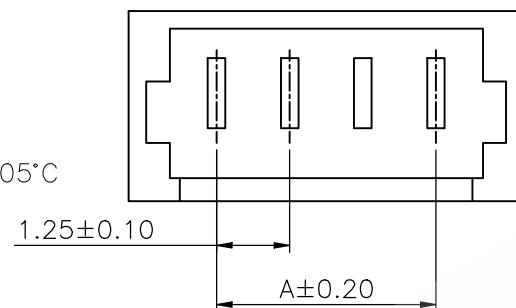

Ordering Information

H1250F-XXP-XA


1 2 3 4 5

- 1:—Series No.
2:—F:Female Housing
3:—No. of Positions
4:—N:Natural
B:Black
5:—A:In Bag

PIN	A	B	C
02	1.25	4.25	2.95
03	2.50	5.50	4.20
04	3.75	6.75	5.45
05	5.00	8.00	6.70
06	6.25	9.25	7.95
07	7.50	10.50	9.20
08	8.75	11.75	10.45
09	10.00	13.00	11.70
10	11.25	14.25	12.95
11	12.50	15.50	14.20
12	13.75	16.75	15.45
13	15.00	18.00	16.70
14	16.25	19.25	17.95
15	17.50	20.50	19.20
16	18.75	21.75	20.45
17	20.00	23.00	21.70
18	21.25	24.25	22.95

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H1250F-XXP-XA
	LINEAR	ANGLES	
CHKD.: Aaron	X:	x': ±2.0°	DWG. NO.:
	X.X: ±0.25	X.X': ±2.0°	
APPD.: Billy	X.XX: ±0.13	X.XX': ±2.0°	TITLE : 1.25mm Pitch Crimp Style Housing
	X.XXX: ±0.05	X.XXX': ±2.0°	
			DATE: 29-Jul-2019

HJBRIGHT® 東莞市華晶電子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	 THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	