

Specifications:

Material:phosphor bronze

Wire Range:AWG#26~30

Insulation O.D.:1.10(max)

Operating Temperature Range:-40~+105°C

Ordering Information

H1254T-PX

1 2 3





1:—Series No.

2:—T:Terminal


3:—Plated:

Q:Plated Tin

A:Gold flash

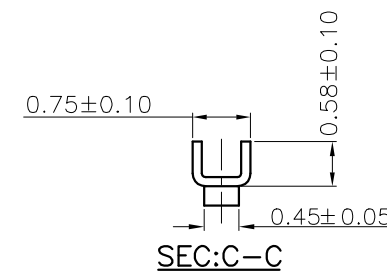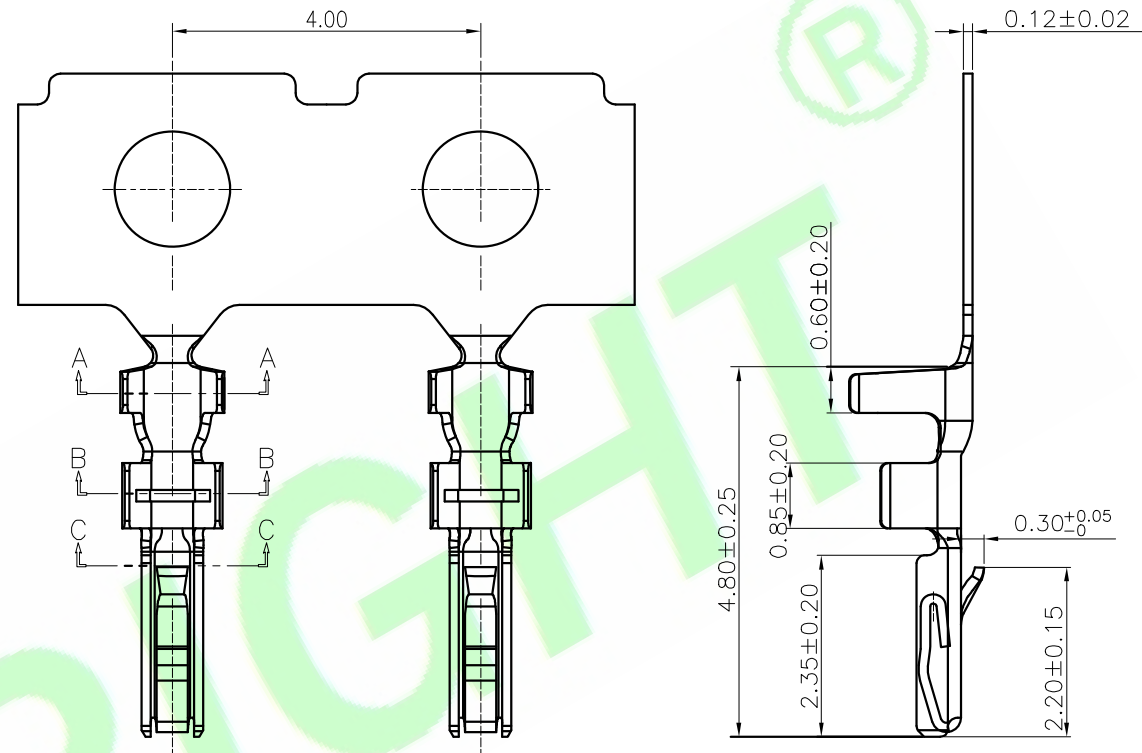

6X	New electroplating code	JoinZm	20250609	DR.BY.: Tsw	GENERAL TOLERANCE:	PART NO : H1254T-PX
5X	Optimized drawing	Judyyan	20241105	CHKD.: Mike	LINEAR	DWG. NO.:
4X	Update shrapnel dimension tolerance: change from 0.30±0.10 to 0.30±0.05	Judyyan	20240702	APPD.: Billy	ANGLES	TITLE :
3X	Update the description	Aren	20230420		X.: ±	1.250mm Pitch Crimp Style Teriminal
2X	Update the description	Judyyan	20220712		X.X: ±0.25	DATE: 04-Jun-2021
REV	DESCRIPTION	DR.BY	ECN. NO		X.XX: ±0.15	
					X.XXX: ±0.08	
					X.XX: ±3.0°	
					X.XX: ±2.0°	
					X.XXX: ±2.0°	

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		