

RoHS Compliant



Specifications:

Material And Finish:

Insulator:PBT+10%GF UL94V-0,

Rating:

Current Rating:2.0 Amp

Operating Temperature Range:-40°~+130°C

Electrical:

Insulator resistance:100M ohm min.

According to the requirements of LV214

Ordering Information

H1270-XXP-XA



1 2 3

1:— Series No.

2:— No. of Positions(02-10)


3:— B:Black
N:Nature

4:— A:In Bag

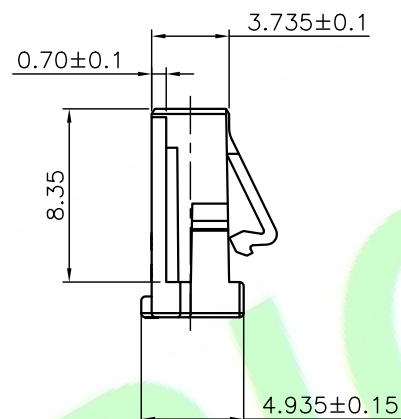

(No.of Position*1.27)+2.13±0.1


(No.of Position*1.27)+3.33±0.2




Black




Nature




2PIN




3PIN




4PIN




5PIN




6PIN




7PIN



8PIN



9PIN

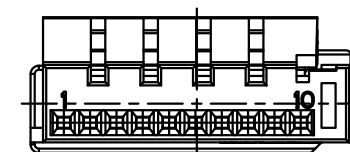

10PIN

1X	ORIGINAL	Zolin	
REV.	DESCRIPTION	DR.BY	ECN. NO

DR.BY:	Zolin
CHKD.:	Hu.CH
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
x.: ±0.25	x.x: ±2.0°
x.xx: ±0.13	x.xx: ±2.0°
x.xxx: ±0.05	x.xxx: ±2.0°

PART NO : H1270-XXP-XA
DWG. NO.:
TITLE : 1.27mm Pitch Crimp Style Housing PICO MQS Series
DATE: 5-Feb-2024

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITEDSHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4