

RoHS Compliant









Specifications:
Material:High Conductivity Copper
Wire Range:AWG#24~26
Insulation O.D.:0.95-1.05

Ordering Information
H1270T-PX-02

1 2 3

- 1: — Series No.
2: — T:Terminal
3: — A:Gold Flash
Q: Tin Plated

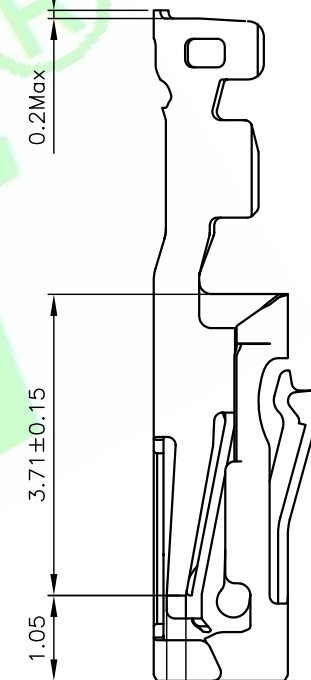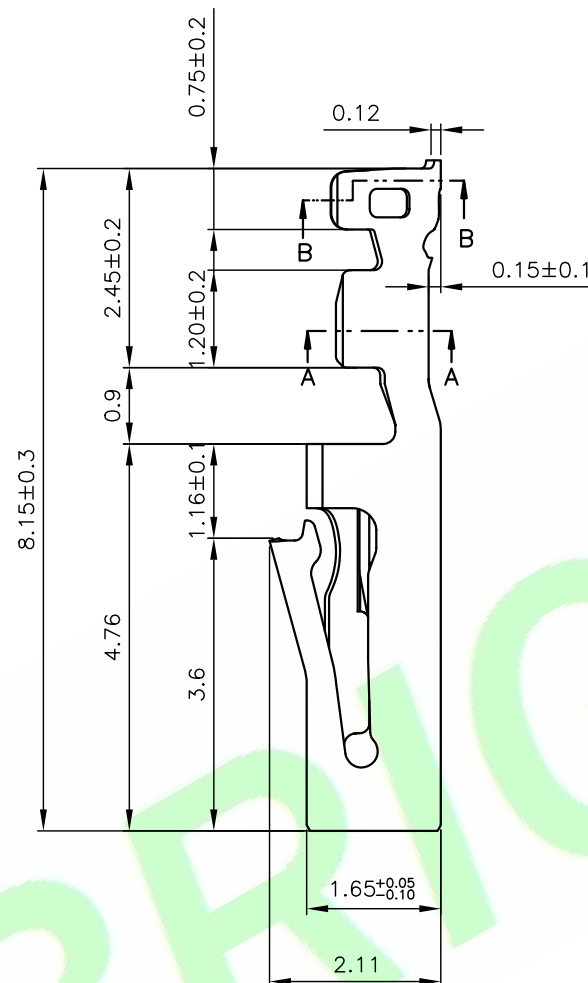

DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : H1270T-PX-02	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch CRIMP TERMINAL PICO MQS Series	
	x.x: ±0.25	x.x': ±3.0°		
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 5-Feb-2024	
	x.xxx: ±0.10	x.xxx': ±1.0°		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

1X	ORIGINAL	Zolin	
REV.	DESCRIPTION	DR.BY	

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4