

Specifications:

Material And Finish:

Insulator:PBT UL94V-0, Color:Black

Rating:

Current Rating:2.0 Amp






Voltage Rating:125V AC/DC

Operating Temperature Range:-25°~+85°C

Contact Resistance:20mΩ Max

Insulation Resistance 500MΩ Min

Withstanding Voltage:500V AC/mlnute

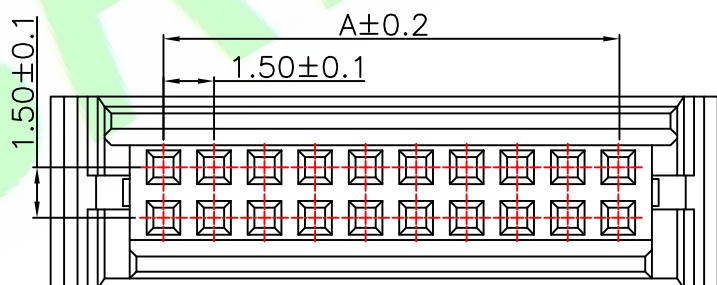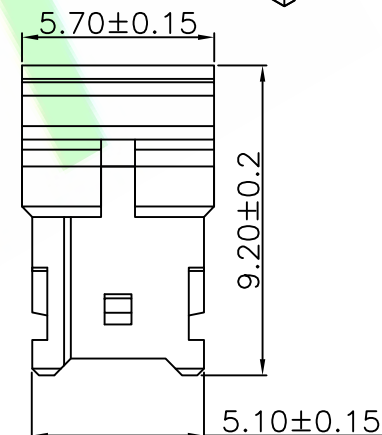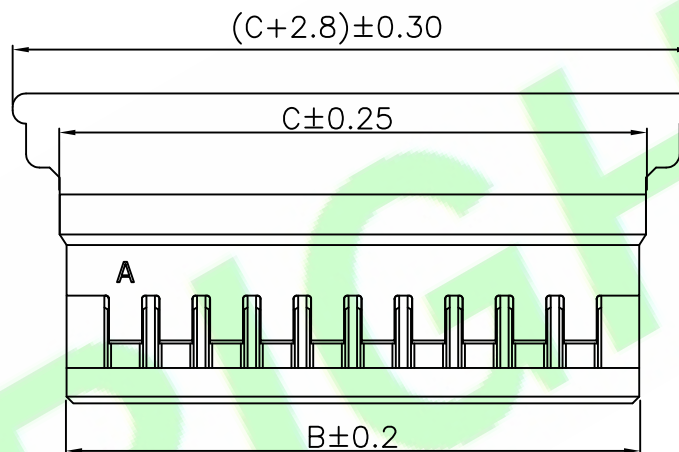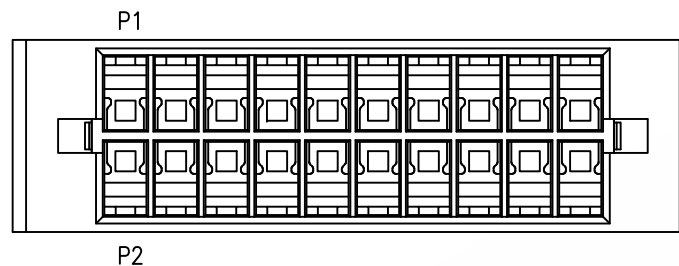

Ordering Information

H15000-XXP-A

1 2 3

1: — Series No.

2: — No. of Positions

3: — A:In Bag

Circuits	Dimension mm		
	A	B	C
20	13.50	17.00	17.40
22	15.00	18.50	18.90
24	16.50	20.00	20.40

5X			
4X	restructure	AREN	20230430
3X	Natural color changed to black	Judyyan	20221130
2X	Update code options	Judyyan	20220725
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:	Mark
CHKD.:	Aaron
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.25	X': ±5.0°
X.X: ±0.15	X.X': ±3.0°
X.XX: ±0.05	X.XX': ±2.0°
X.XXX: ±0.05	X.XXX': ±1.0°

PART NO : H15000-XXP-A
DWG. NO.:
TITLE : 1.5mm Pitch Housing
DATE: 16-Jul-2016

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4