






Specifications:
 Material And Finish:
 Insulator:PA66+30%GF UL94V-0 Color:Natural

Rating:
 Current Rating:2.0A AC/DC(24AWG)
 Voltage Rating:100V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:
 Contact resistance:10m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information
H15007M-XXP-01-X
 1 2 3 4

- 1: — Series No.
- 2: — Male Housing
- 3: — No. of Positions
- 4: — A:In bag
 B:In Tube
 C:In Tray

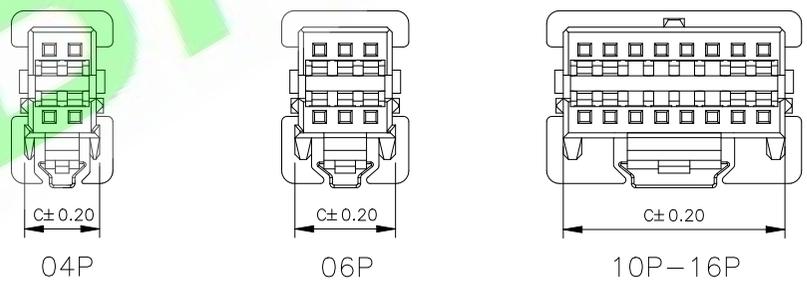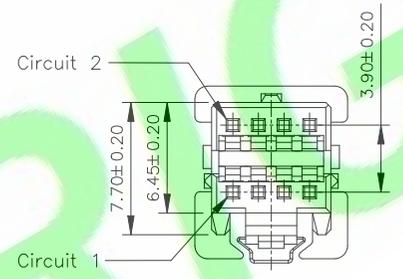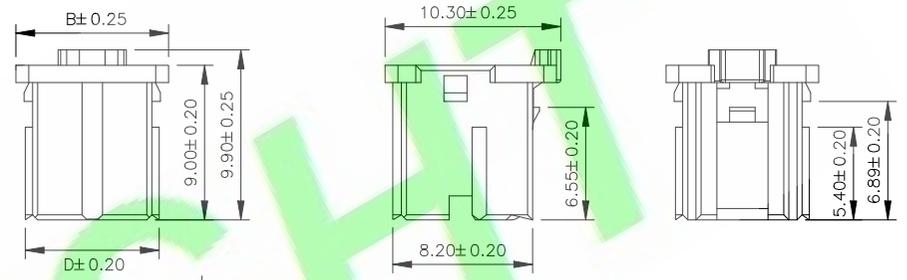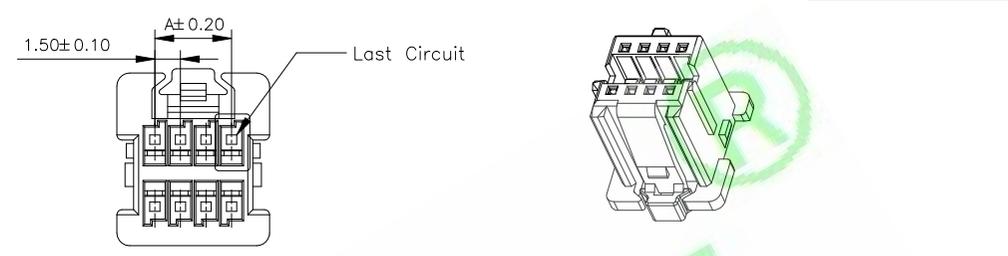

Circuits	Dimensions			
	A	B	C	D
04P	1.50	6.00	4.40	4.85
06P	3.00	7.50	5.90	6.35
08P	4.50	9.00	7.00	7.85
10P	6.00	10.50	8.50	9.35
12P	7.50	12.00	10.00	10.85
14P	9.00	13.50	13.50	12.35
16P	10.50	15.00	13.00	13.85

DR.BY.: XIAO	GENERAL TOLERANCE:		PART NO : H15007M-XXP-01-X
CHKD.: Judyyan	LINEAR	ANGLES	DWG. No.:
APPD.: Billy	x.: ±0.30	x': ±5.0°	TITLE :
	x.x: ±0.20	x.x': ±3.0°	1.50mm Pitch Male Housing
	x.xx: ±0.15	x.xx': ±2.0°	DATE: 17-Dec-2025
	x.xxx: ±0.10	x.xxx': ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	XIAO	
	DESCRIPTION	DR.BY	ECN. NO