

Specifications:

Material And Finish

Insulator:PBT UL94V-0 Color:BlackI

Rating:

Current Rating:40A Amps (With 10 AWG)

:60A Amps (With 8 AWG)

:80A Amps (With 6 AWG)

:100A Amps (With 4 AWG)

:110A Amps (With 2 AWG)

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:0.1m Ohm Max

Insulator resistance:5000M ohm min.

Withstanding Voltage:2200V DC/Minute

Ordering Information

H1700M-02P-01-A


1 2 3 4


1:— Series No.

2:— M:Male Housing

3:— No. of Positions

4:— A:In Bag

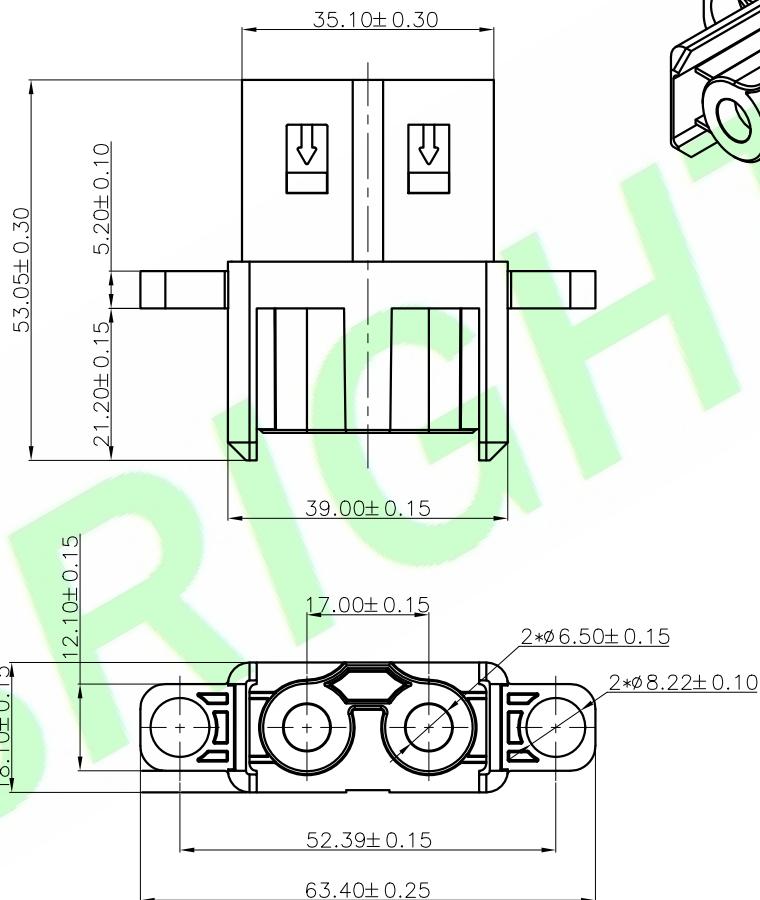

DR.BY:		GENERAL TOLERANCE:		PART NO : H1700M-02P-01-A		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
JoinZm		LINEAR	ANGLES	DWG. NO.:					
CHKD.:		X.:	X':	TITLE : 17.00mm Pitch Male Housing		SHEET: 1/1			A 4
Judyyan		X.X: ±0.10	X.X':			SCALE: 1:1			
APPD.:		X.XX: ±0.05	X.XX':			UNIT: mm			
Billy		X.XXX: ±0.02	X.XXX':			DATE: 08-Nov-2023			

1X	ORIGINAL	JoinZm	ECN. NO
REV.	DESCRIPTION	DR.BY	