

Specifications:

Material And Finish

Insulator:PBT UL94V-0 Color:BlackI

Rating:

Current Rating:40A Amps (With 10 AWG)

:60A Amps (With 8 AWG)

:80A Amps (With 6 AWG)

:100A Amps (With 4 AWG)

:110A Amps (With 2 AWG)





Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:0.1m Ohm Max


Insulator resistance:5000M ohm min.

Withstanding Voltage:2200V DC/Minute

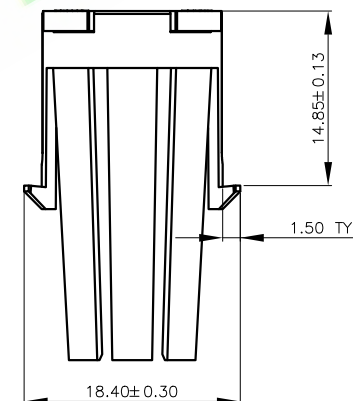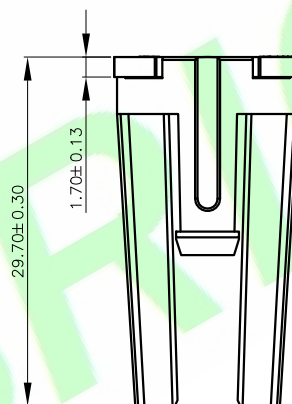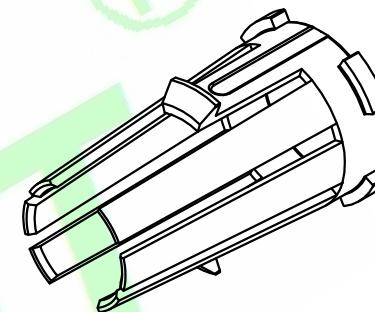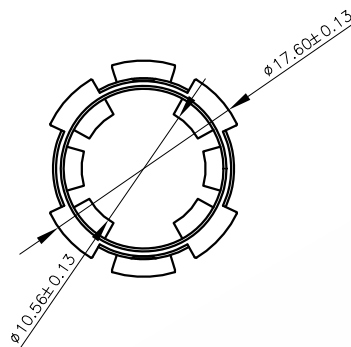

1X	ORIGINAL	JoinZm
REV.	DESCRIPTION	DR.BY

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : H1700M-TPA	
	LINEAR	ANGLES	DWG. NO.:	
	X.:	X°:	TITLE :	
	X.X: ±0.10	X.X°:	H1700M series TPA	
	X.XX: ±0.05	X.XX°:	DATE: 08-Nov-2023	
CHKD.: Judyyan	X.XXX: ±0.02	X.XXX°:		
APPD.: Billy				

HJBRIGHT[®] 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		
SCALE: 1:1		
UNIT: mm	THIRD ANGLE PROJECTION	