

Specifications:**Material And Finish:**

Contact: Copper alloy

Rating:

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$ **Electrical:**

Contact resistance: 10m Ohm Max

Insulator resistance: 100M Ohm min.

Wire Gauge: #22~24AWG

Ordering Information**H1800TM-PS**




1 2 3 4

1: Series No.

2: T: Terminal

3: M: Male

4: S: Matte Tin Plated

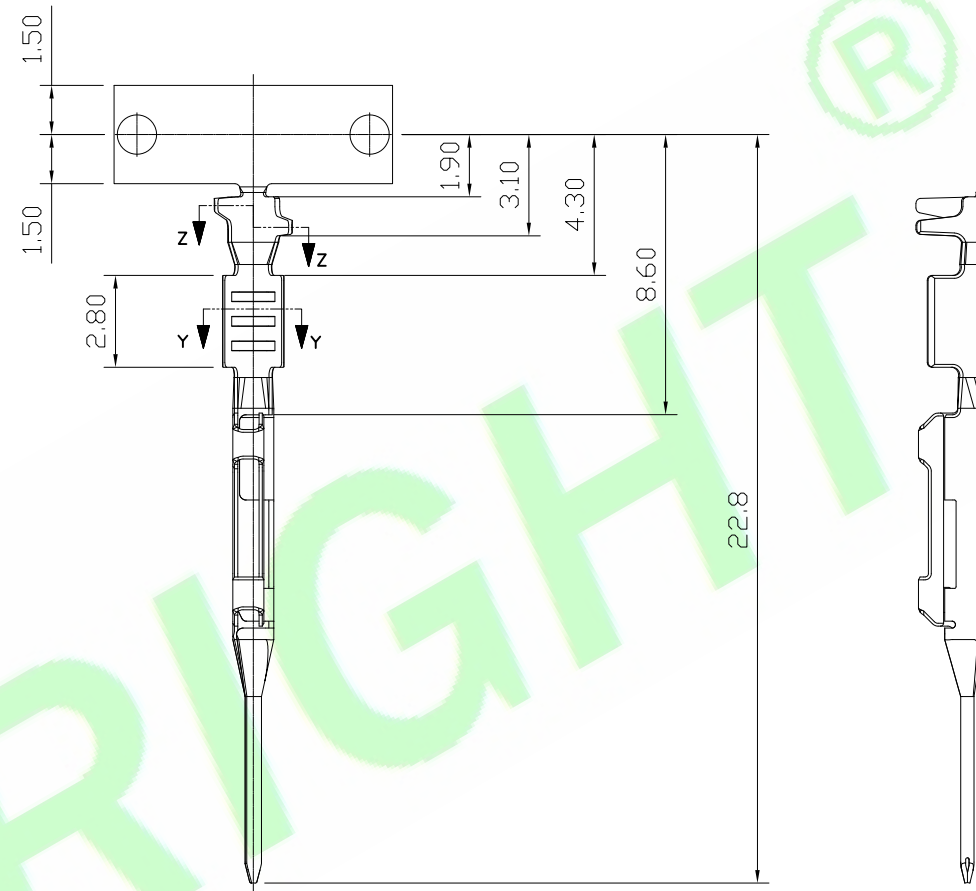

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H1800TM-PS		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Aren			x.: x.X: ±0.30	x': ±5.0° x.X': ±3.0°			
2X					x.XX: ±0.20	x.XX': ±2.0°					
1X	ORIGINAL	Judyyan		APPD.: Billy	x.XXX: ±0.10	x.XXX': ±1.0°	DATE: 14-Nov-2022		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.					SCALE: 1:1			
								UNIT: mm	THIRD ANGLE PROJECTION		