

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Color:Natural White

Rating:

Current Rating:4.0 Amp(#22AWG)

Voltage Rating:350V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M Ohm min.

Withstanding Voltage:1700V AC/Minute

Ordering Information

H1801-02P-01-XA






1 2 34


1: — Series No.

2: — No. of Positions

3: — Color:N—Natural

4: — A:In Bag

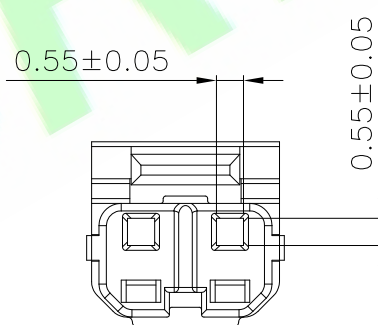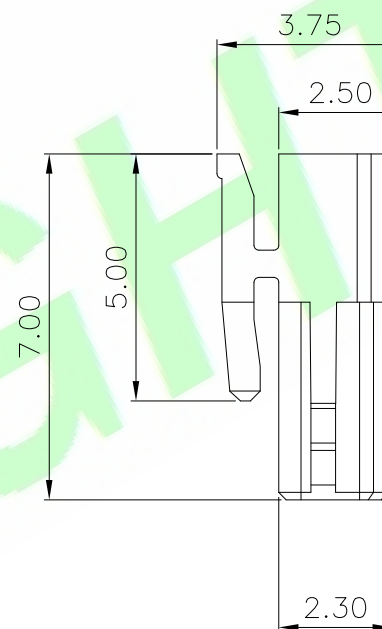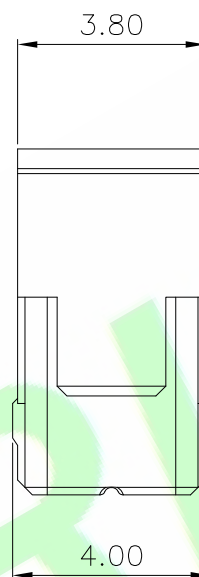

5X				DR.BY.: Pip	GENERAL TOLERANCE:		PART NO : H1801-02P-01-XA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X					LINEAR		ANGLES					DWG. NO.:			
3X				CHKD.: Aren	X.:	X.:	±5.0°	TITLE : 1.8mm Housing							
2X					X.X:	±0.30	X.X:					±3.0°			
1X	ORIGINAL	Pip		APPD.: Billy	X.XX:	±0.20	X.XX:	±2.0°				SHEET: 1/1		A4	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX:	±0.10	X.XXX:	±1.0°				DATE: 10-Oct-2019			SCALE: 1:1
								UNIT: mm	THIRD ANGLE PROJECTION						
1		2		3		4		5		6		7		8	