

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Color:Natural White

Rating:

Current Rating:4.0Amp(#22AWG)

Voltage Rating:350V AC/DC

Operating Temperature Range:-40~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M Ohm min.

Withstanding Voltage:1700V AC/Minute

Ordering Information

H1801-02P-02-XA






1 2 34


1: — Series No.

2: — No. of Positions

3: — Color:N—Natural

4: — A:In Bag

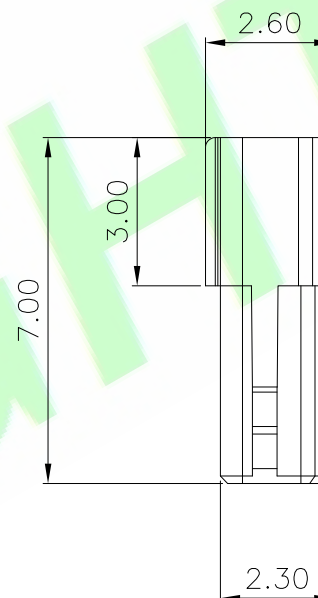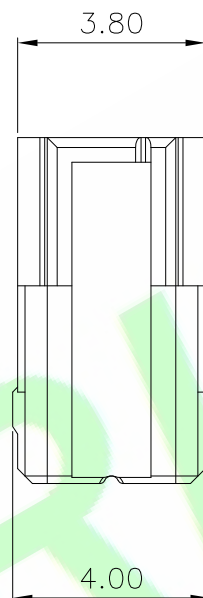

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H1801-02P-02-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1		A4
4X				Pip	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	X.:	X': ±5.0°	TITLE : 1.8mm Housing	SCALE: 1:1		UNIT: mm	THIRD ANGLE PROJECTION	
2X				Aren	X.X: ±0.30	X.X': ±3.0°						
1X	ORIGINAL	Pip		APPD.:	X.XX: ±0.20	X.XX': ±2.0°	DATE: 10-Oct-2019					
REV.	DESCRIPTION	DR.BY		Billy	X.XXX: ±0.10	X.XXX': ±1.0°						
	1	2	3		4	5	6	7	8			