

Specifications:**Material And Finish:**

Contact: Copper alloy

Rating:

Current Rating: 3 Amp

Voltage Rating: 50V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$ **Electrical:**

Contact resistance: 20m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 500V AC/Minute

Ordering Information**H18012T-XX-01-X**

1 2 3 4 5 6

1: — Series No.

2: — T: Terminal

3: — H: High Performance

S: Standard

4: — Q: Tin Plated.



A: Gold Flash.

O: Plate With Silver

5: — 01: Wire Size Range: $0.22\sim 0.35\text{mm}^2$ 02: Wire Size Range: $0.13\sim 0.17\text{mm}^2$

6: — A: TYPE A.

B: TYPE B.

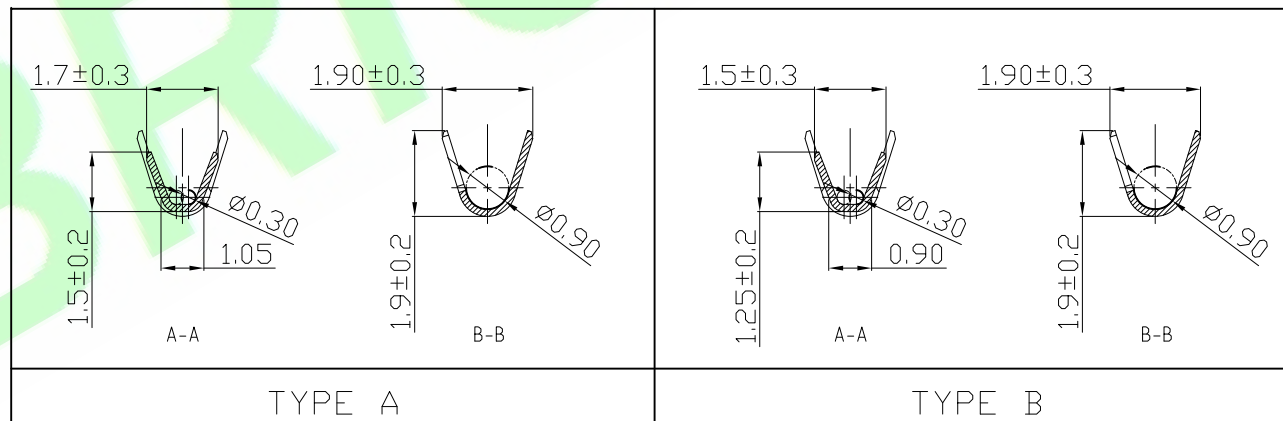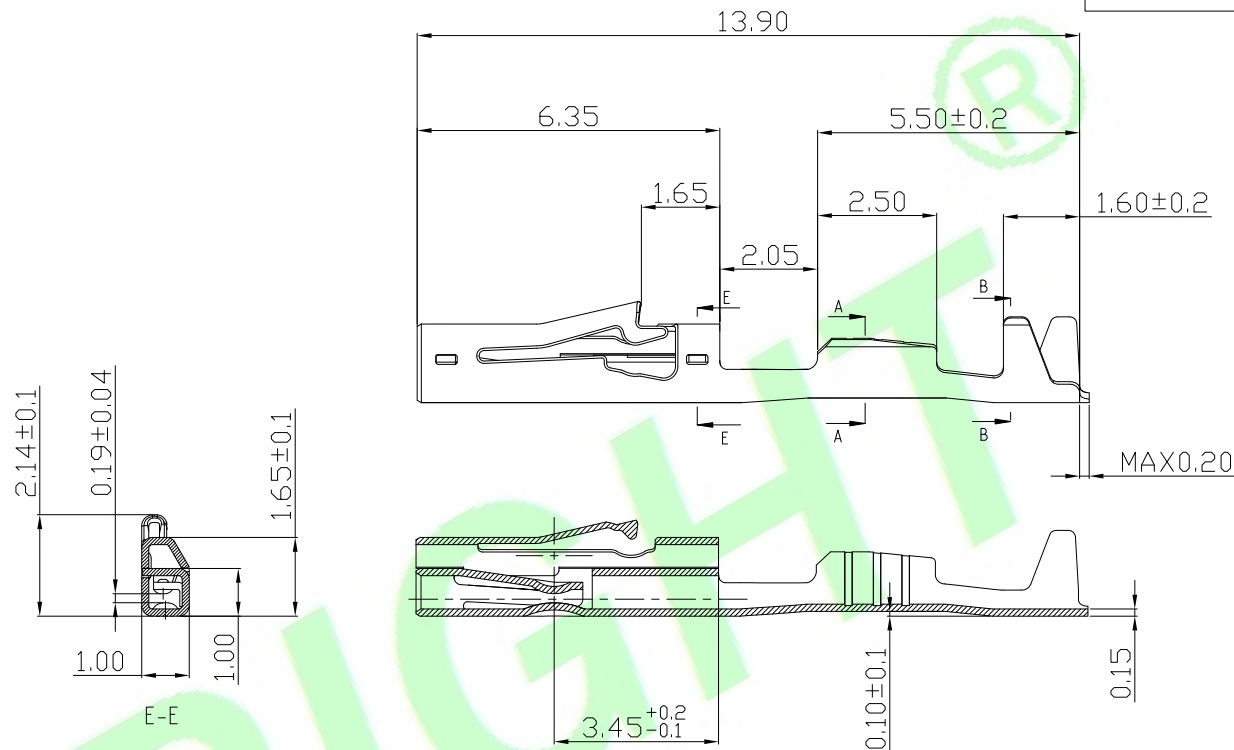

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H18012T-XX-01-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Aren			X.: ±0.30	X': ±5.0°			
2X					X.X: ±0.25	X.X': ±3.0°					
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ±0.20	X.XX': ±2.0°					
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.15	X.XXX': ±1.0°	DATE: 30-Sep-2021				
							SHEET: 1/1			A4	
							SCALE: 1:1				
							UNIT: mm				
							THIRD ANGLE PROJECTION				

SHEET: 1/1

SCALE: 1:1

UNIT: mm

THIRD ANGLE PROJECTION