

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC


Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

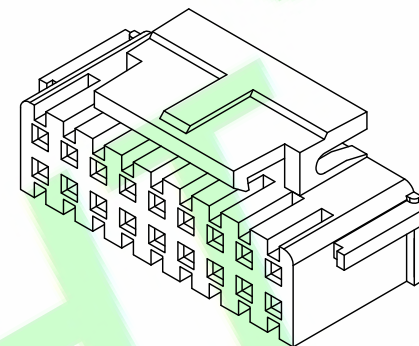


Ordering Information

H20002M-XXP-A

1 2 3 4

- 1: — Series No.
2: — M:Male
3: — No. of Positions
4: — A:In bag

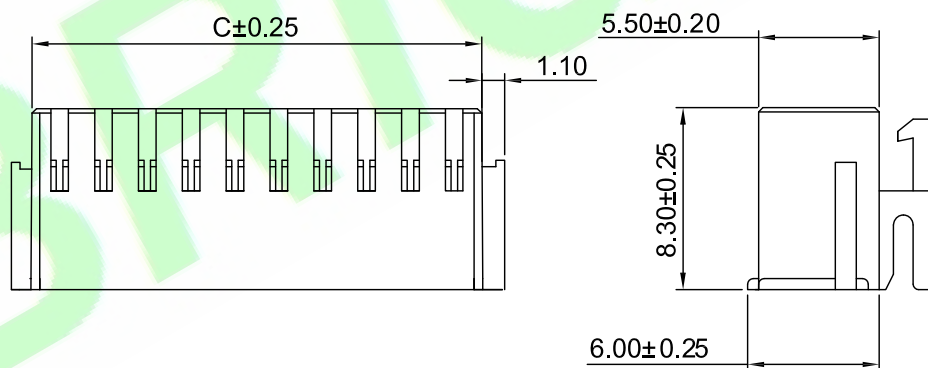

Pin 数	Dimensions		
	A	B	C
06	4.00	7.70	6.70
08	6.00	9.70	8.70
10	8.00	11.70	10.70
12	10.00	13.70	12.70
14	12.00	15.70	14.70
16	14.00	17.70	16.70
18	16.00	19.70	18.70
20	18.00	21.70	20.70
22	20.00	23.70	22.70
24	22.00	25.70	24.70
26	24.00	27.70	26.70
28	26.00	29.70	28.70
30	28.00	31.70	30.70
32	30.00	33.70	32.70
40	38.00	41.70	40.70

5X			
4X			
3X			
2X	Update code options	Judyyan	20220826
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson	GENERAL TOLERANCE:	
	LINEAR	ANGLES
CHKD.: Tony	X.: ± 0.30	X': $\pm 5.0^\circ$
	X.X: ± 0.20	X.X': $\pm 3.0^\circ$
APPD.: Billy	X.XX: ± 0.10	X.XX': $\pm 2.0^\circ$
	X.XXX: ± 0.10	X.XXX': $\pm 1.0^\circ$

PART NO : H20002M-XXP-A
DWG. NO.:
TITLE : 2.00mm Dual Row Male Housing
DATE: 12-Jan-2015

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	THIRD ANGLE PROJECTION A4
SCALE: 1:1	
UNIT: mm	