

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Rating:

Current Rating:3.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:15m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

Ordering Information

H2000F-XXP-XA

1 2 3 4 5

1: — Series No.

2: — F:Female

3: — No. of Positions

4: — Color:

N:Natural

B:Black

R:Red

BL:Blue


GN:Green

LG:Light Green

GY:Gray


YL:Yellow

5: — A:In bag

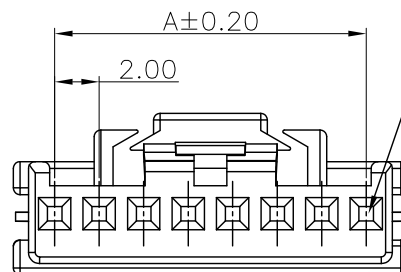


5P~15P


Circuit 1





2P



3P



4P

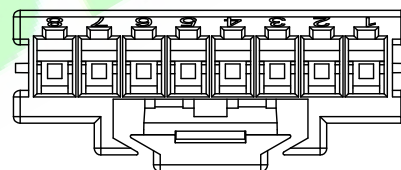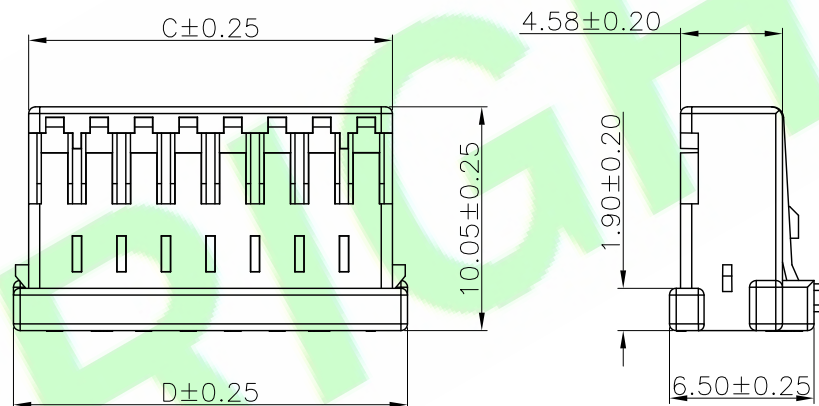

Poles	Dimensions (mm)		
	A	B	C
02P	2.00	5.71	4.35
03P	4.00	7.71	6.35
04P	6.00	9.71	8.35
05P	8.00	11.71	10.35
06P	10.00	13.71	12.35
07P	12.00	15.71	14.35
08P	14.00	17.71	16.35
09P	16.00	19.71	18.35
10P	18.00	21.71	20.35
11P	20.00	23.71	22.35
12P	22.00	25.71	24.35
13P	24.00	27.71	26.35
14P	26.00	29.71	28.35
15P	28.00	31.71	30.35

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H2000F-XXP-XA	HJBRIGHT® 东莞市華晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Mark	x.:	x': ±5.0°	TITLE : 2.00mm Crimp Style Housing Female	SHEET: 1/1		A4
2X				APPD.: Billy	x.x: ±0.30	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Judyyan			x.xx: ±0.20	x.xx': ±2.0°		DATE: 3-Aug-2020		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				