

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:PA66 UL94V-0

Rating:

Current Rating:3.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° C~+105° C

Electrical:

Contact resistance:15m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute



Ordering Information**H2000M-XXP-XA**

1 2 3 4 5

- 1: — Series No.
 2: — M:Male
 3: — No. of Positions
 4: — Color:

N:Natural
 B:Black
 R:Red
 BL:Blue
 GN:Green
 LG:Light Green
 GY:Gray
 YL:Yellow

- 5: — A:In bag

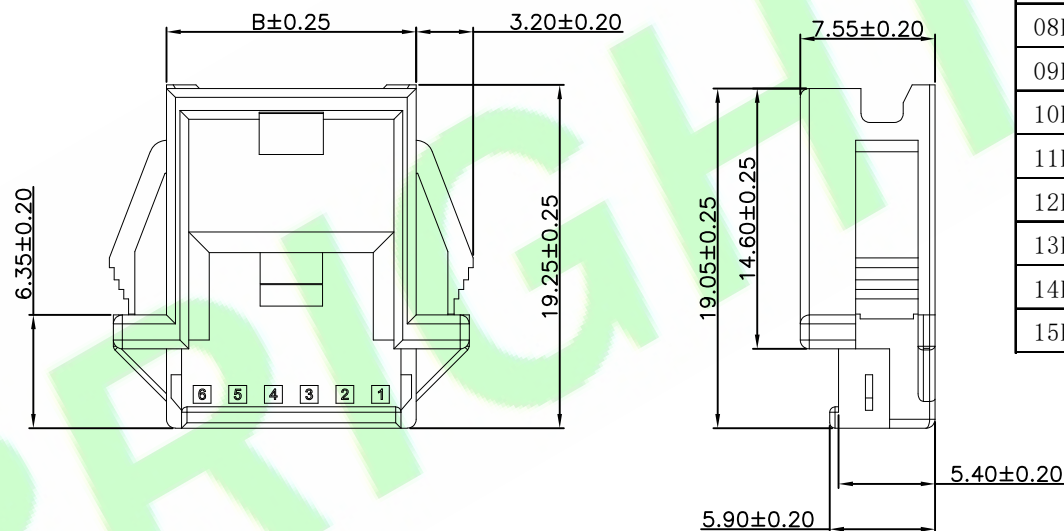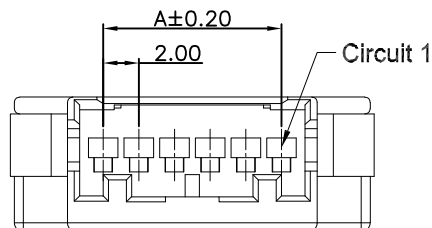

Poles	Dimensions (mm)		
	A	B	C
02P	2.00	6.00	1.50
03P	4.00	8.00	2.06
04P	6.00	10.00	3.60
05P	8.00	12.00	3.60
06P	10.00	14.00	3.60
07P	12.00	16.00	3.60
08P	14.00	18.00	3.60
09P	16.00	20.00	3.60
10P	18.00	22.00	3.60
11P	20.00	24.00	3.60
12P	22.00	26.00	3.60
13P	24.00	28.00	3.60
14P	26.00	30.00	3.60
15P	28.00	32.00	3.60

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H2000M-XXP-XA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	x.:	x': ±5.0°	TITLE : 2.00mm Crimp Style Housing Male		SHEET: 1/1			A4
2X				Mark	x.x: ±0.30	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx': ±2.0°	DATE: 3-Aug-2020		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°						

THIRD ANGLE PROJECTION