

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Rating:

Current Rating:2.0 Amp

Voltage Rating:250V AC/DC



Operating Temperature Range:-25°C~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

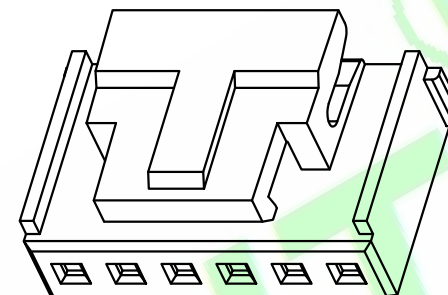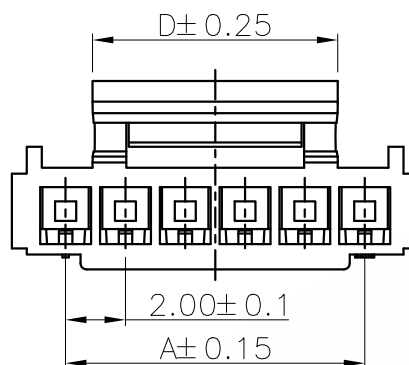

Ordering Information

H2007-XXP-XA

1 2 3 4

1: — Series No.

2: — No. of Positions



3: — Color:

N:Natural

B:Black

R:Red

4: — A:In Bag

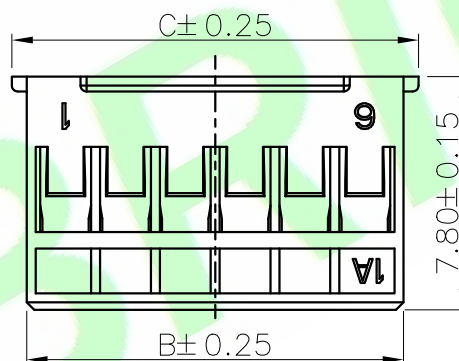

PIN.	DIM A	DIM B	DIM C	DIM D
2	2.00	4.60	5.60	3.20
3	4.00	6.60	7.60	4.00
4	6.00	8.60	9.60	5.00
5	8.00	10.60	11.60	6.20
6	10.00	12.60	13.60	8.20
7	12.00	14.60	15.60	10.20
8	14.00	16.60	17.60	12.20
9	16.00	18.60	19.60	14.20
10	18.00	20.60	21.60	16.20
11	20.00	22.60	23.60	16.20
12	22.00	24.60	25.60	16.20
13	24.00	26.60	27.60	16.20
14	26.00	28.60	29.60	16.20
15	28.00	30.60	31.60	16.20
16	30.00	32.60	33.60	16.20

DR.BY.:

Annie

GENERAL TOLERANCE:

LINEAR

ANGLES

CHKD.:

Judyyan

x.:

x: ±5.0°

x.x: ±0.30

x.x: ±2.0°

APPD.:

Billy

x.xx: ±0.20

x.xx: ±1.0°

x.xxx: ±0.10

x.xxx:

PART NO : H2007-XXP-XA

DWG. NO.:

TITLE :

2.0mm Pitch Wafer For Housing

DATE: 26-Nov-2024

HJBRIGHT® 東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1







UNIT: mm



THIRD ANGLE PROJECTION

A4





1X	ORIGINAL	Annie	
REV	DESCRIPTION	DR.BY	ECN. NO

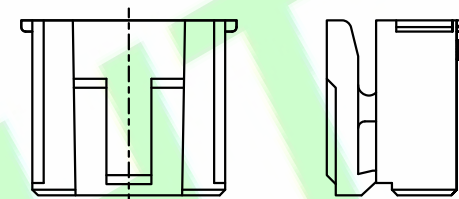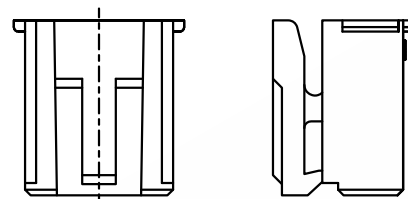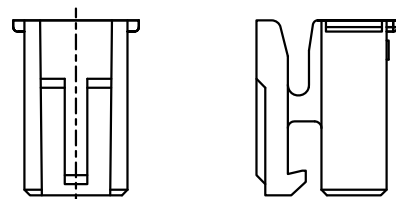

2P

3P

4P

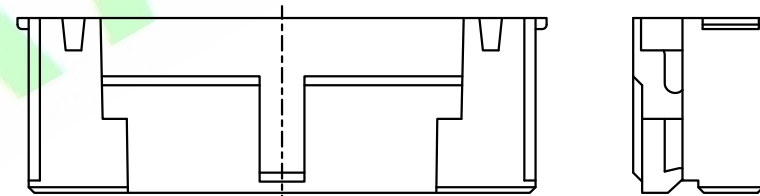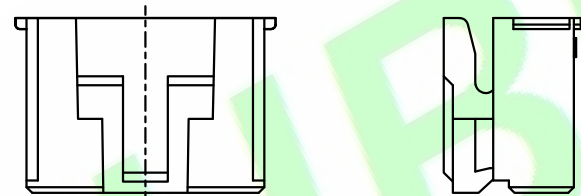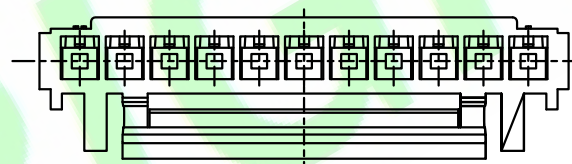


5P~10P

11P~16P

1X	ORIGINAL	Annie	
REV	DESCRIPTION	DR.BY	ECN. NO

DR.BY.: Annie	GENERAL TOLERANCE:		PART NO : H2007-XXP-XA	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Wafer For Housing	
	x.xx: ±0.20	x.x': ±2.0°		
APPD.: Billy	x.xxx: ±0.10	x.x': ±1.0°	DATE: 26-Nov-2024	

HJBRIGHT[®] 東莞市華晶電子有限公司				A4
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
SHEET: 1/1	SCALE: 1:1			
UNIT: mm		THIRD ANGLE PROJECTION		