

Specifications:**Material And Finish:**

Insulator:PA66 UL94V-0

Rating:

Current Rating:4.0 Amp (2P/22AWG)

Voltage Rating:250V AC/DC






Operating Temperature Range:-40°~+125°C

Electrical:




Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

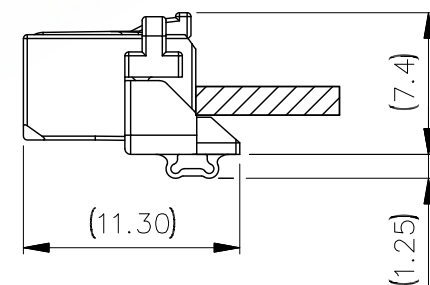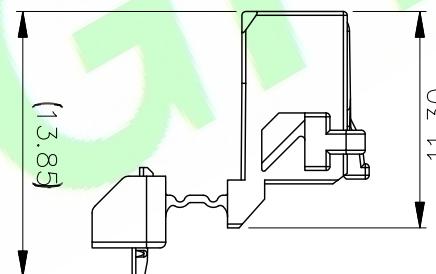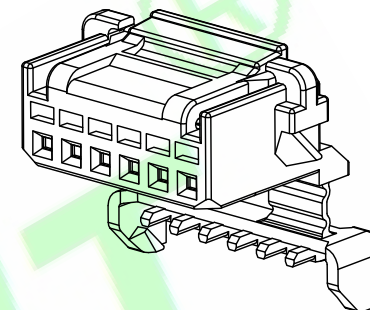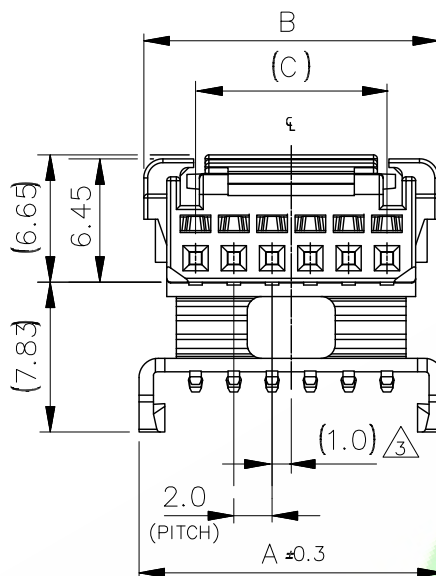

AFTER LOCKING ISL.



VIEW OF 2 CIRCUIT VIEW OF 4 CIRCUIT

VIEW OF 8 CIRCUIT

Ordering Information

H2014-XXP-01-XA

1 2 34

1: — Series No.

2: — No. of Positions

3: — N:Natural

B:Black

4: — A:In Bag

5X				DR.BY.: Deng	GENERAL TOLERANCE:		PART NO : H2014-XXP-01-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			SHEET: 1/1 SCALE: 1:1 UNIT: mm	 THIRD ANGLE PROJECTION	A4
4X					LINEAR	ANGLES	DWG. NO.:						
3X				CHKD.: Aren	x.:	x': ±5.0°	TITLE : 2.00mm Housing						
2X					x.x: ±0.30	x.x': ±3.0°							
1X	ORIGINAL	Deng		APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°							
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 17-May-2023						