

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66/PBT UL94V-0 Color:Black

Rating:

Current Rating:2.0 Amp

Voltage Rating:125V AC/DC



Operating Temperature Range:-40℃~105℃

Electrical:

Contact resistance:20m Ohm Max.

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

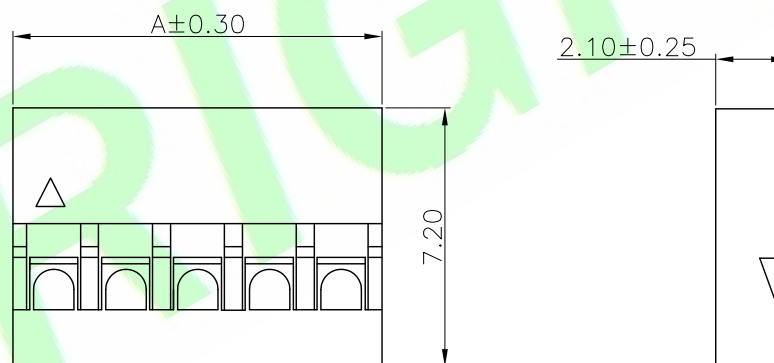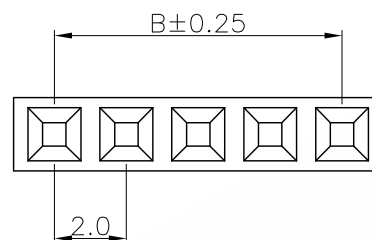

No.	Dimension mm	
	A	B
1P	---	2.20
2P	2.00	4.20
3P	4.00	6.20
4P	6.00	8.20
5P	8.00	10.20
6P	10.00	12.20
7P	12.00	14.20
8P	14.00	16.20
9P	16.00	18.20
10P	18.00	20.20
11P	20.00	22.20
12P	22.00	24.20
13P	24.00	26.20
14P	26.00	28.20
15P	28.00	30.20
16P	30.00	32.20
17P	32.00	34.20
18P	34.00	36.20
19P	36.00	38.20
20P	38.00	40.20
21P	40.00	42.20
22P	42.00	44.20
23P	44.00	46.20
24P	46.00	48.20
25P	48.00	50.20

Ordering Information

H2015-XXP-01-XA

1 2 3 4

1:—Series No.

2:—No. of Positions

3:—A:PA66

P:PBT

4:—A:In bag

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H2015-XXP-01-XA	
4X				Bruce	LINEAR	ANGLES	DWG. NO.:	
3X				CHKD.:	X.:	X': ±	TITLE :	
2X	Update Code options	Judyyan	20221222	Tony	X.X: ±0.25	X.X': ±6°	2.00mm Pitch Dual Row Housing	
1X	ORIGINAL	Bruce		APPD.:	X.XX: ±0.15	X.XX': ±3°	DATE: 19-Jul-2016	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.08	X.XXX': ±2°	UNIT: mm	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4