

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66/PBT UL94V-0 Color:Black

Rating:

Current Rating:2.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40℃~105℃

Electrical:

Contact resistance:20m Ohm Max.



Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

H20150-XXP-02-XA
1 2 3 4

- 1:—Series No.
2:—No. of Positions
3:—A:PA66
P:PBT
4:—A:In bag

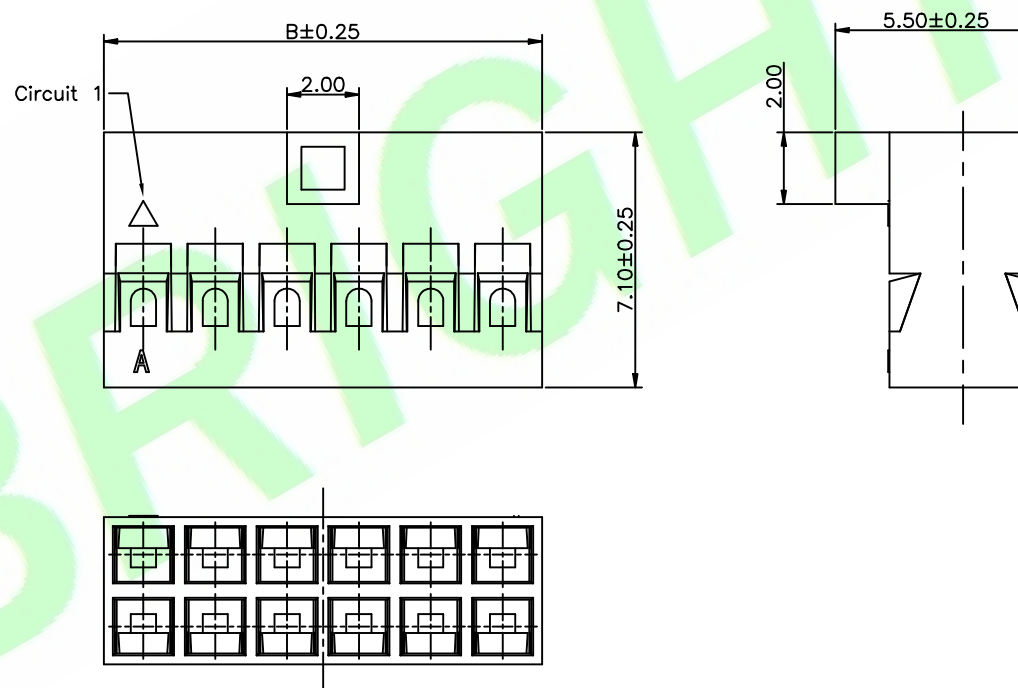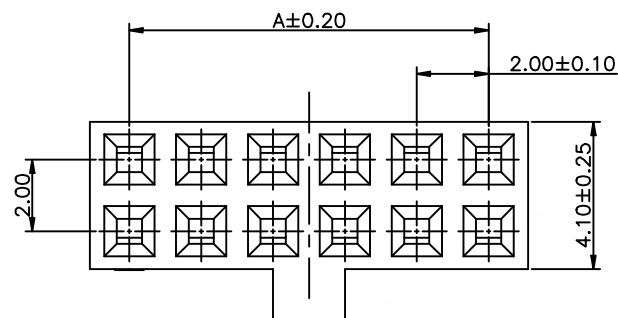

No.	Dimension mm	
	A	B
2*2	2.00	4.20
2*3	4.00	6.20
2*4	6.00	8.20
2*5	8.00	10.20
2*6	10.00	12.20
2*7	12.00	14.20
2*8	14.00	16.20
2*9	16.00	18.20
2*10	18.00	20.20
2*11	20.00	22.20
2*12	22.00	24.20
2*13	24.00	26.20
2*14	26.00	28.20
2*15	28.00	30.20
2*16	30.00	32.20
2*17	32.00	34.20
2*18	34.00	36.20
2*19	36.00	38.20
2*20	38.00	40.20
2*21	40.00	42.20
2*22	42.00	44.20
2*23	44.00	46.20
2*24	46.00	48.20
2*25	48.00	50.20

DR.BY.:
BruceGENERAL TOLERANCE:
LINEAR ANGLES

PART NO : H20150-XXP-02-XA

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

3X	Update the drawing view	Judyyan	20241121
2X	Update Code options	Judyyan	20221222
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO

CHKD.:
Tony
APPD.:
BillyX: ±0.25
X.X: ±0.15
X.XX: ±0.08
X.XX: ±0.15
X.XX: ±0.08
X.XXX: ±0.08
X.XXX: ±0.08
X.XXX: ±0.08

DWG. NO.:

TITLE :

2.00mm Pitch Dual Row Housing

DATE: 19-Jul-2016

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4