

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Rating:

Current Rating:

24AWG:Single Ckt:6.00A

24AWG:Fully Loaded(50 Ckts):2.40A

26AWG:Single Ckt:5.40A

26AWG:Fully Loaded(50 Ckts):2.20A

28AWG:Single Ckt:5.00A

28AWG:Fully Loaded(50 Ckts):2.00A

30AWG:Single Ckt:4.40A

30AWG:Fully Loaded(50 Ckts):1.80A

Voltage Rating:125V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:40m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

H20150A-XXP-XX-A

1 2 3 4

1: — Series No.

2: — No. of Positions

3: — Type:





01:A Type

02:B Type

03:C Type

4: — A:In Bag

RoHS Compliant

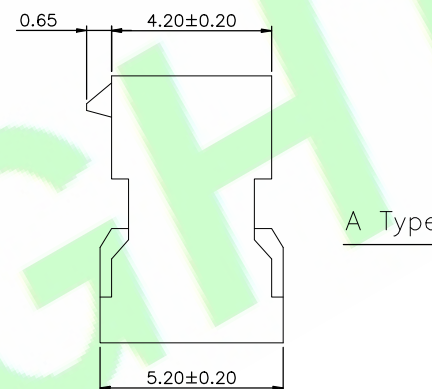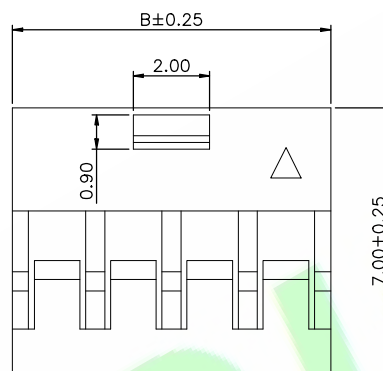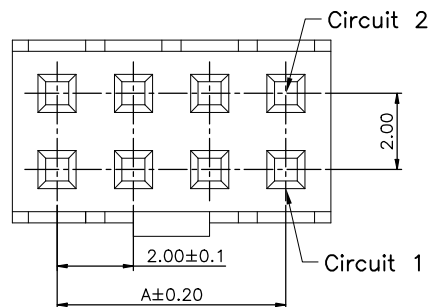

Poles	Dimension	
	A	B
04P	2.00	4.35
06P	4.00	6.35
08P	6.00	8.35
10P	8.00	10.35
12P	10.00	12.35
14P	12.00	14.35
16P	14.00	16.35
18P	16.00	18.35
20P	18.00	20.35
22P	20.00	22.35
24P	22.00	24.35
26P	24.00	26.35
28P	26.00	28.35
30P	28.00	30.35
32P	30.00	32.35
34P	32.00	34.35
36P	34.00	36.35
38P	36.00	38.35
40P	38.00	40.35

Ordering Information

H20150A-XXP-XX-A

1 2 3 4

1: — Series No.

2: — No. of Positions

3: — Type:


01:A Type

02:B Type


03:C Type

4: — A:In Bag

B Type

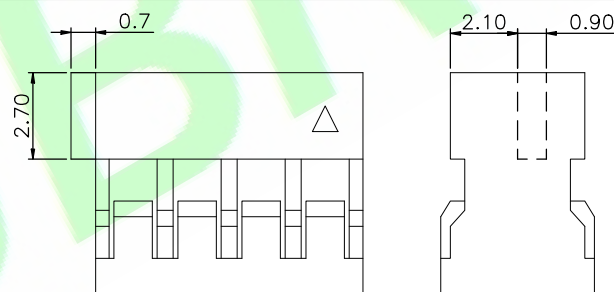

C Type

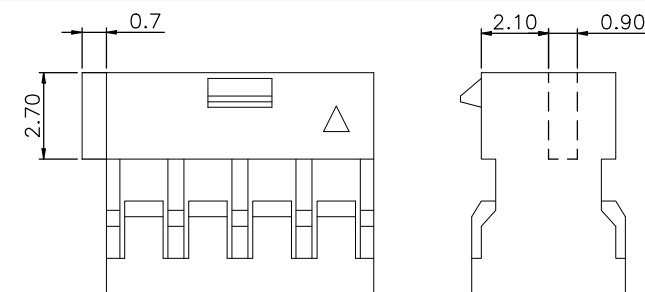

2X	Update code options	Judyyan	20250311
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Judyyan
CHKD.:	Aaron
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X.X: ±5.0°
X.X: ±0.20	X.XX: ±3.0°
X.XX: ±0.10	X.XXX: ±2.0°
X.XXX: ±0.10	X.XXXX: ±1.0°

PART NO. : H20150A-XXP-XX-A
DWG. NO.:
TITLE : 2.0mm Pitch Dual Row Housing
DATE: 21-Oct-2019

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	 THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	

A4

A4