

Specifications:**Material And Finish:**

Insulator:PA66 UL94V-0

Rating:

Current Rating:2.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25°C~+85°C

Electrical:

Contact resistance:10m Ohm Max

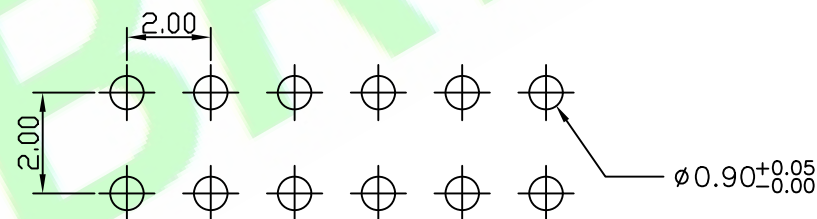
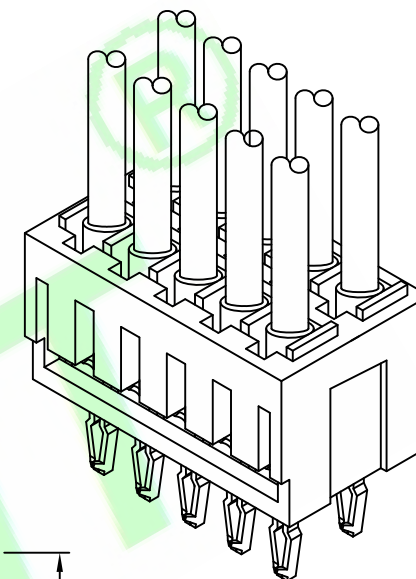

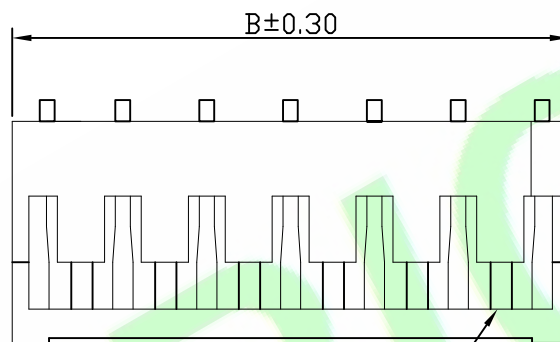
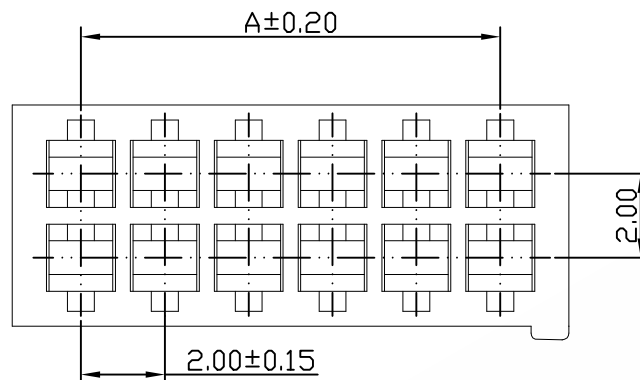
Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

Ordering Information**H20170S-XXP-01-XA**

1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type Housing
3: — No. of positions
4: — N: Natural (white)
5: — A: In Bag

**P.C.B LAYOUT**

PART NO.	Dimensions	
	A	B
04P	2.00	5.20
06P	4.00	7.20
08P	6.00	9.20
10P	8.00	11.20
12P	10.00	13.20
14P	12.00	15.20
16P	14.00	17.20
18P	16.00	19.20
20P	18.00	21.20
22P	20.00	23.20
24P	22.00	25.20
26P	24.00	27.20
28P	26.00	29.20
30P	28.00	31.20

DR.BY.: Anne	GENERAL TOLERANCE:		PART NO : H20170S-XXP-01-XA
CHKD.: Judyyan	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.50	X': ±6.0°	TITLE :
	X.X: ±0.30	X.X': ±3.0°	2.00mm Pitch Straight Type Housing
	X.XX: ±0.20	X.XX': ±2.0°	DATE: 09-Oct-2024
	X.XXX: ±0.10	X.XXX': ±2.0°	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

1X	ORIGINAL	Anne	
REV	DESCRIPTION	DR.BY	ECN. NO

SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		