

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0 Color:Natura

Rating:

Current Rating:2.0 Amp





Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

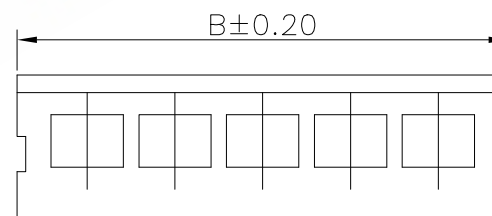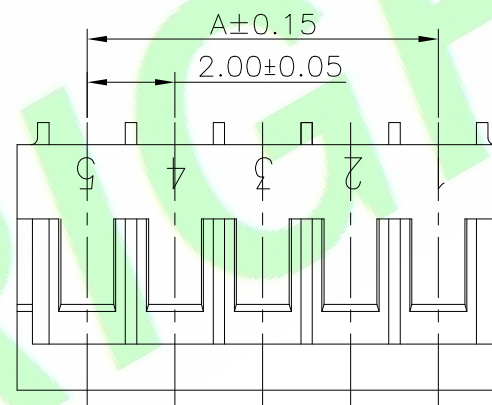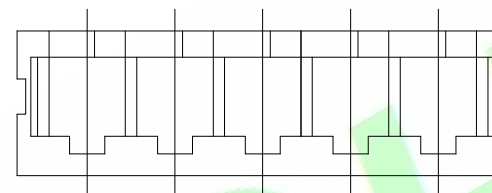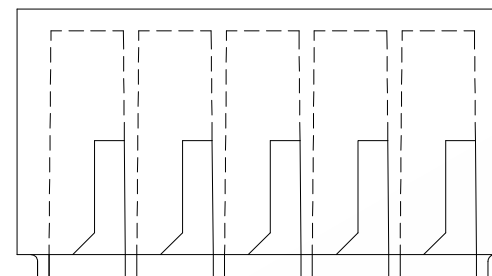

Ordering Information

H2017R-XXP-01-XA
1 3 4 5

1:—Series No.

2:—No. of Positions

3:—W:White

B:Black

Y:Yellow


4:—A:In Bag

Circuits No.	Dimensions	
	A	B
2P	2.00	5.20
3P	4.00	7.20
4P	6.00	9.20
5P	8.00	11.20
6P	10.00	13.20
7P	12.00	15.20
8P	14.00	17.20
9P	16.00	19.20
10P	18.00	21.20
11P	20.00	23.20
12P	22.00	25.20
13P	24.00	27.20
14P	26.00	29.20
15P	28.00	31.20
16P	30.00	33.20
17P	32.00	35.20
18P	34.00	37.20
19P	36.00	39.20
20P	38.00	41.20

3X	New code R	Judyyan	20241217
2X	Update code options	Judyyan	20221210
1X	ORIGINAL	Sophia	
REV.	DESCRIPTION	DR.BY	ECN. NO

DR.BY: Sophia	GENERAL TOLERANCE:	
CHKD.: Tony	LINEAR	ANGLES
APPD.: Billy	x.: ±0.20	x': ±5.0°
	x.x: ±0.15	x.x': ±3.0°
	x.xx: ±0.10	x.xx': ±2.0°
	x.xxx: ±0.10	x.xxx': ±1.0°

PART NO : H2017R-XXP-01-XA
DWG. NO.:
TITLE : 2.00mm Pitch Housing R/A Type
DATE: 13-May-2020

HJBRIGHT ® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		