

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0,

Color:Natural(White)

Rating:

Current Rating:3 Amp

Voltage Rating:125V AC/DC






Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:250V AC/Minute

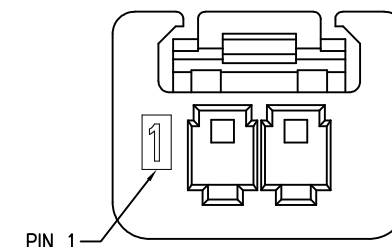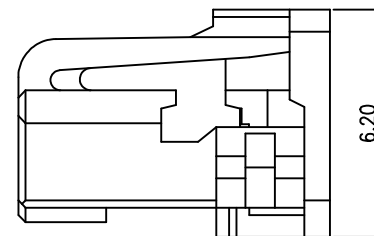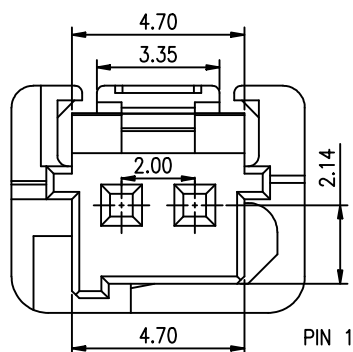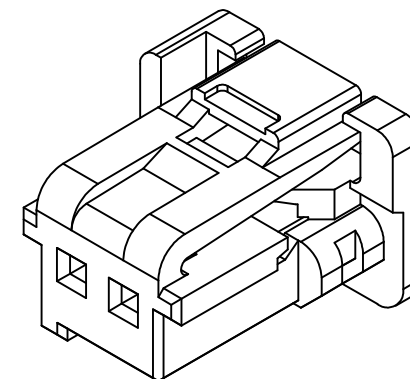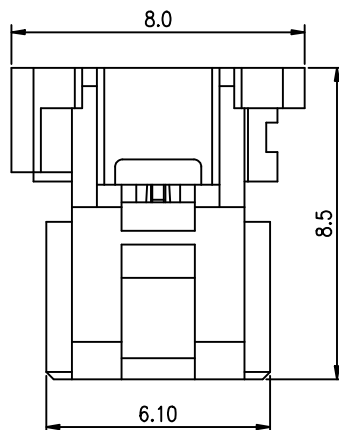

Ordering Information

H2018-02P-XX-A

1 2 3 4

1: — Series No.


2: — No. of Positions

3: — 01:A Type


02:B Type

03:C Type


4: — A:In Bag



A Type



B Type



C Type

5X			
4X			
3X			
2X	Rating current correction	Judyyan	20240605
1X	ORIGINAL	Aren	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Aren
CHKD.: Aren
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±2.0°	X.X: ±2.0°
X.X: ±0.25	X.XX: ±2.0°
X.XX: ±0.13	X.XXX: ±2.0°
X.XXX: ±0.05	

PART NO : H2018-02P-XX-A
DWG. NO.:
TITLE : 2.0mm Pitch Housing
DATE: 02-Aug-2023

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4