

Specifications:
Material And Finish:
Insulator: PA66 UL94V-0 Color:Black






Rating:
Current Rating:3.0 Amp (22AWG)
Voltage Rating:125V AC/DC
Operating Temperature Range:-55°~+105°C
Contact Resistance:20mΩ Max
Insulation Resistance:500MΩ Min
Withstanding Voltage:1000V AC/mInute

Ordering Information

H2020-XXP-A

1 2 3

1:— Series No.
2:— No. of Positions
3:— A:In Bag

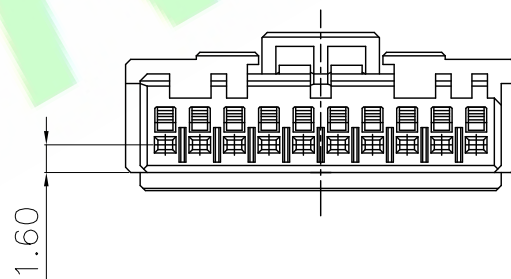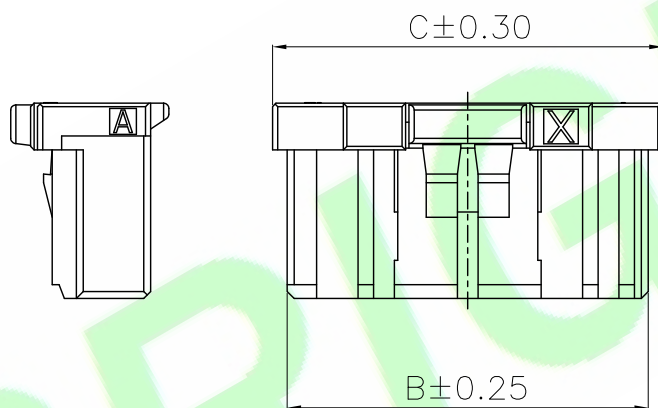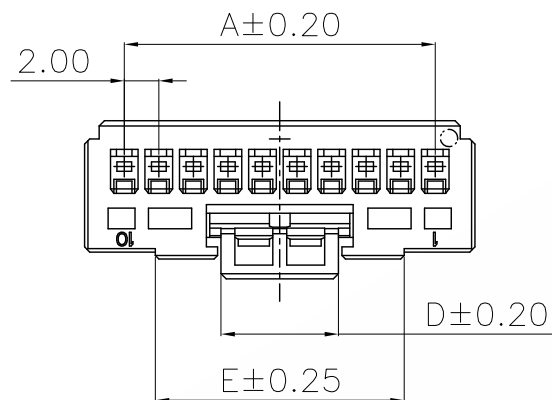

Part No.	Dimension mm				
	A	B	C	D	E
04P	6.00	8.90	10.60	3.60	/
08P	14.00	16.90	18.60	6.80	14.40
10P	18.00	20.90	22.60	6.80	14.40
16P	30.00	32.90	34.60	12.80	26.40

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan
CHKD.: Mark
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±5.0°
X.X: ±0.30	X.X: ±3.0°
X.XX: ±0.20	X.XX: ±2.0°
X.XXX: ±0.15	X.XXX: ±1.0°

PART NO : H2020-XXP-A
DWG. NO.:
TITLE : 2.0mm Pitch REC Housing
DATE: 30-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4