

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Rating:

Current Rating:3.0 Amp(20AWG)

Voltage Rating:125V AC/DC

Operating Temperature Range:



Electrical:

Contact Resistance:20mΩ Max

Insulation Resistance:1000MΩ Min

Withstanding Voltage:1000V AC/Minute

Circuit No.	Dimensions		
	A	B	C
10P	8.00	10.90	12.60
16P	16.00	18.90	20.60
18P	18.00	20.90	22.60
22P	20.00	22.90	24.60
24P	22.00	24.90	26.60
26P	24.00	26.90	28.60
28P	26.00	28.90	30.60
30P	28.00	30.90	32.60
32P	30.00	32.90	34.60
34P	32.00	34.90	36.60
40P	38.00	40.90	42.60

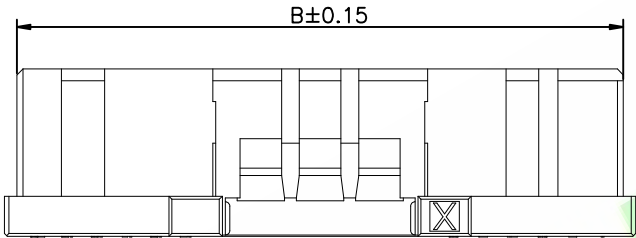

Ordering Information

H20200M-XXP-A


1 2 3 4

1:— Series No.

2:— M:Male Housing

3:— No. of Positions

4:— A:In Pag

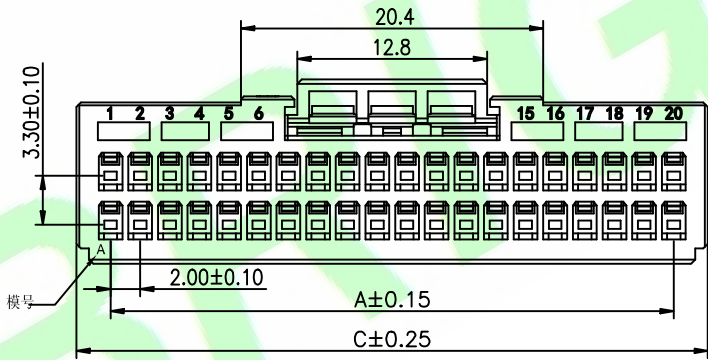

5X			
4X			
3X			
2X			
1X	ORIGINAL	Aren	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Aren
CHKD.: Aren
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.40	X': ±5.0°
X.X: ±0.30	X.X': ±3.0°
X.XX: ±0.20	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°


PART NO : H20200M-XXP-A
DWG. NO.:
TITLE : 2.0mm Pitch REC Housing
DATE:

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/2	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		


RoHS Compliant

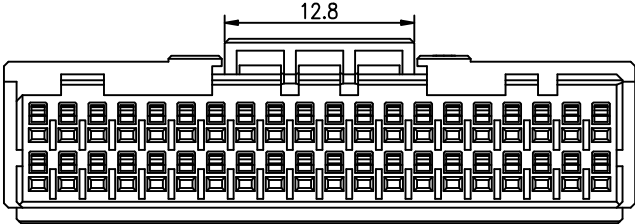


40P

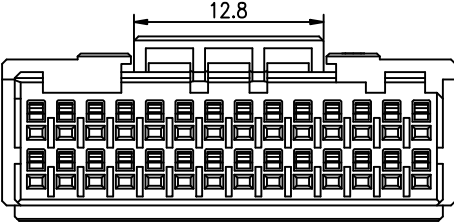


28P

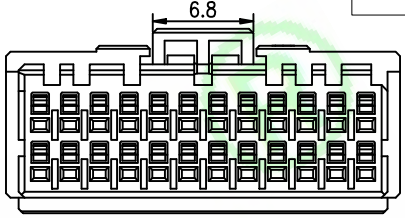


24P

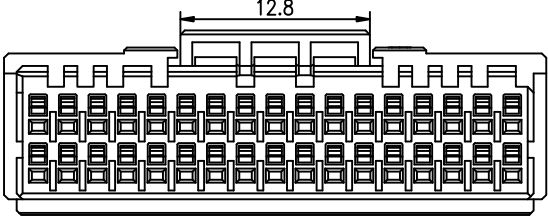


34P

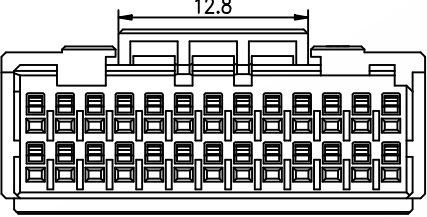


26P




20P

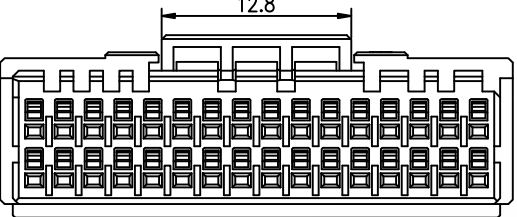


32P

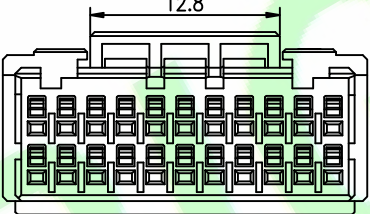


22P



18P

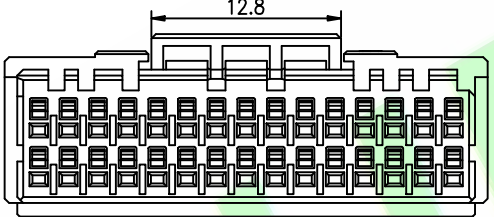

30P



10P

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H20200M—XXP—A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT—E ELECTRONIC TECHNOLOGY LIMITED			
4X				Aren	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	X.: ±0.40	X': ±5.0°	TITLE : 2.0mm Pitch REC Housing		SHEET: 2/2		 THIRD ANGLE PROJECTION	A4
2X				Aren	X.X: ±0.30	X.X': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Aren		APPD.:	X.XX: ±0.20	X.XX': ±2.0°			UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	DATE:					