
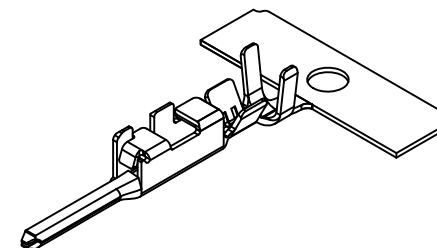



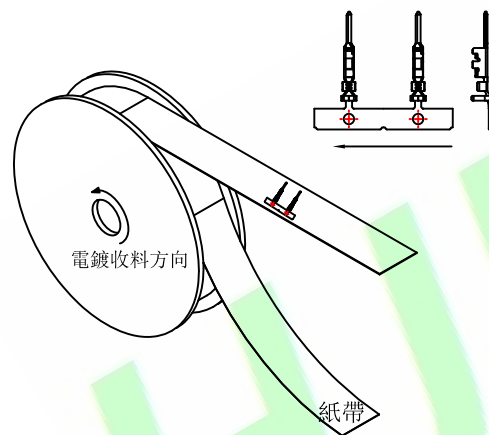



Specifications:
Material: Copper alloy
Wire Range: AWG#22~28
Rating: Current Rating: 3.0A
Operating Temperature Range: -55°~+150°C

Ordering Information
H20200TM-GX-01

1 2 3

- 1: Series No.
2: TM: Male Terminal
3: Plated:
B: Au 5u" plated on contact Area,
M: Au 15u" plated on contact Area

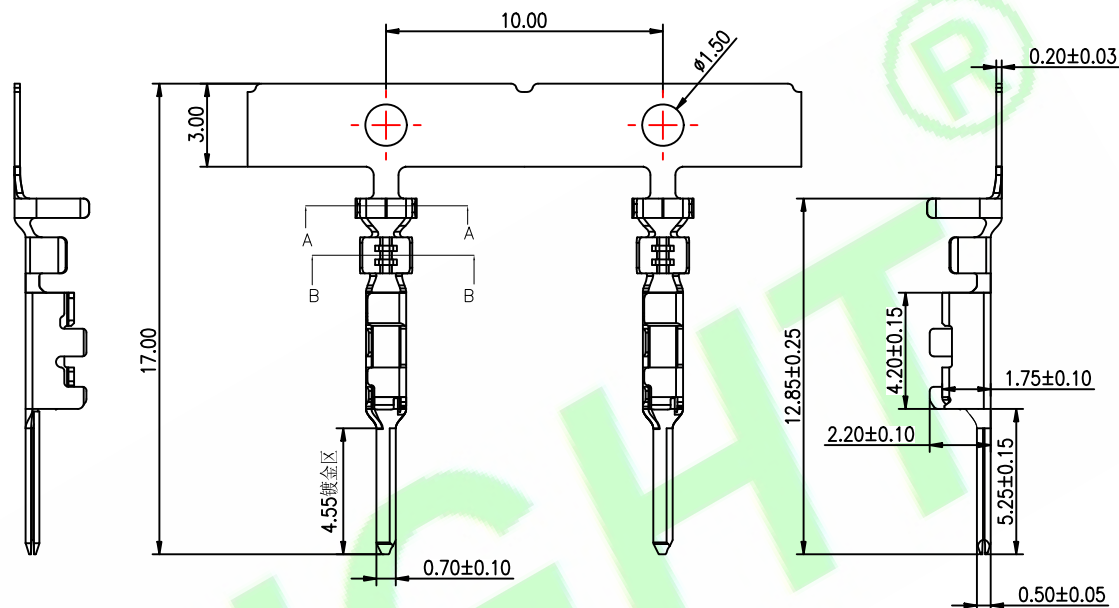

5X				DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : H20200TM-GX-01	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	X.: ±	X': ±6.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	ORIGINAL	Hu.CH			X.X: ±0.25	X.X': ±3.0°	2.00 TAB Terminal	SCALE: 1:1	
1X					X.XX: ±0.15	X.XX': ±2.0°	DATE: 04-Jun-2021	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.08	X.XXX': ±2.0°			A4