

Material:
Terminal: Phosphor Bronze



Rating:
Current Rating: 6.5 Amp
Voltage Rating: 250V AC/DC
Temperature Range: -25°C ~ +85°C

Electrical:
Contact resistance: 20m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 0V AC/Minute
Wire Range: AWG#20~26



Ordering Information

H2022T-PX-XX
1 2 2 3



- 1: — Series No.
2: — T: Terminal
3: — A: Gold Flash
GT: Gold Flash Contact; Tin on tail
4: — 01: 20#~22#AWG
02: 24#~26#AWG

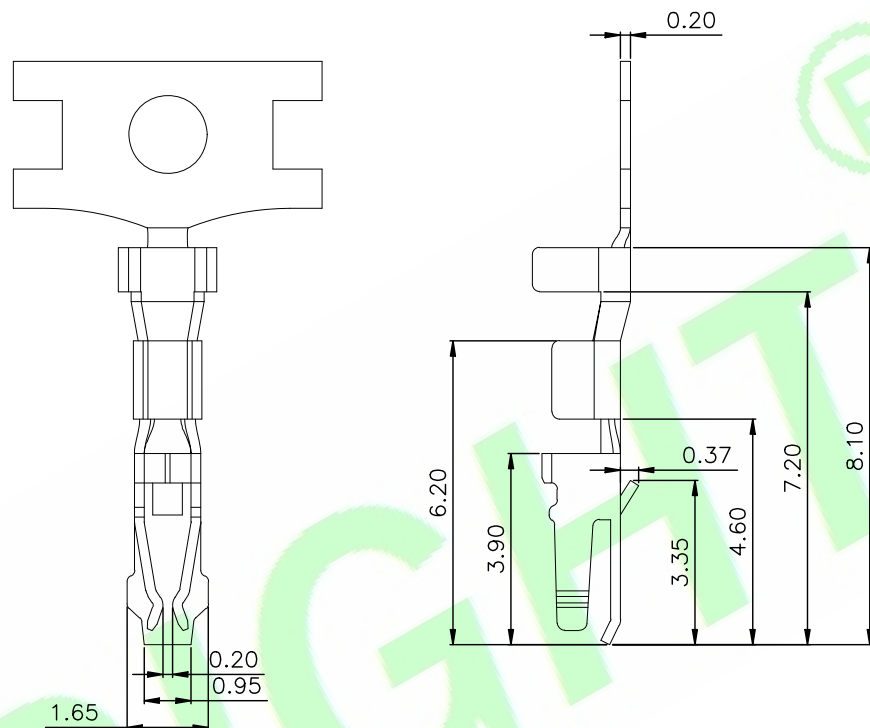

01: 20#~22#AWG



02: 24#~26#AWG

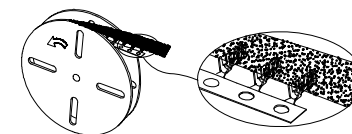

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan
CHKD.: Aren
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±	X': ±5.0°
X.X: ±0.30	X.X': ±3.0°
X.XX: ±0.20	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : H2022T-PX-XX

DWG. NO.:

TITLE :

2.0mm Pitch Terminal

DATE: 22-Aug-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4