

Specifications:
Material And Finish:
Contact:High conductivity copper

Rating:
Current Rating:3.0 Amp
Voltage Rating:50V AC/DC
Operating Temperature Range:-40°~+125°C


Electrical:
Contact resistance:10m Ohm Max

Ordering Information

H20250T-GX-XX

1 2 3 4

- 1: — Series No.
2: — T:Terminal
3: — S:Matte Tin Plated
L:15u" Gold on contact;Matte Tin Plated
Y:30u" Gold on contact;Matte Tin Plated
4: — 01:26~30AWG
02:20~24AWG

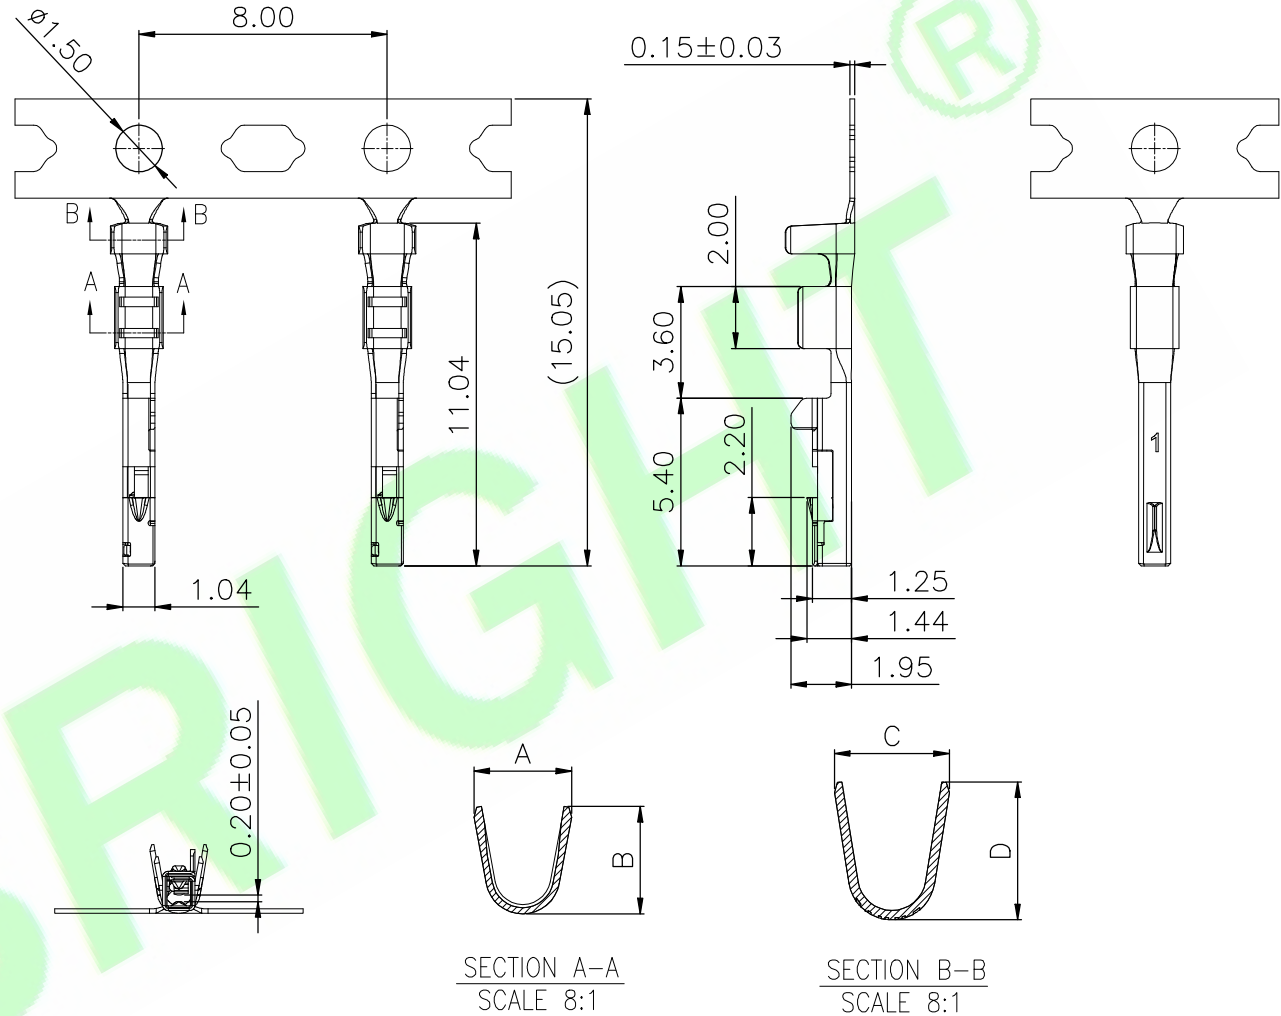


H20250T-GX-01	26~30#AWG	ø0.9mm Max	1.14	1.13	1.36	1.56
H20250T-GX-02	20~24#AWG	ø1.60mm Max	1.57	1.85	1.85	2.22
P/N	WIRE RANGE	Outer diameter of insulation	DIM A	DIM B	DIM C	DIM D

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H20250T-GX-XX
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.40	X': REF±6°	DWG. NO.:
	X.X: ±0.35	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.25	X.XX': ±2.0°	TITLE : Pitch 2.0mm Double Row Connector Terminal
	X.XXX: ±0.15	X.XXX':	
DATE: 27-Aug-2023			

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.