

五金图

模具: XXXX

RoHS Compliant

Automobile
Product




Specifications:
Material And Finish:
Contact:Copper alloy

Rating:
Current Rating:3 Amp
Operating Temperature Range:-40°~+125°C
Contact resistance:20m Ohm Max
Applicable Wire:20~26AWG(0.13~0.50mm²)


Ordering Information

H2027TF-PQ-XX
1 2 3 4

- 1: — Series No.
2: — TF:Female Terminal
3: — Q: Tin Plated
4: — 01:20~22AWG
02:24~26AWG

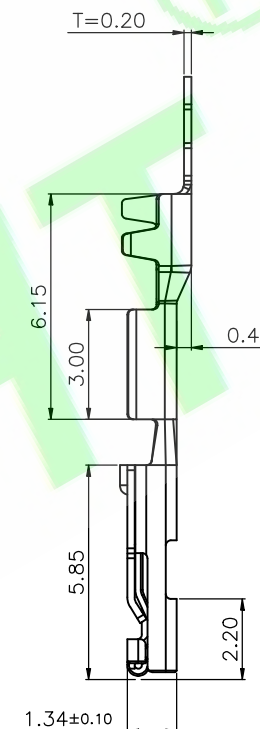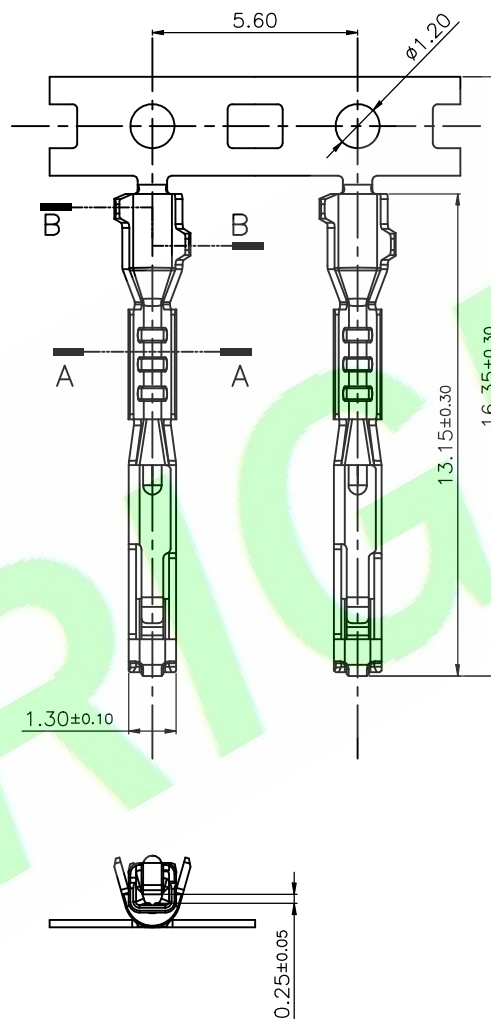

A-A



B-B

H2027TF-PQ-01	20~22AWG	0.30~0.50mm	2.0	2.8	2.0	2.3
H2027TF-PQ-02	24~26AWG	0.13~0.22mm	1.3	2.1	1.3	1.9
P/N	WIRE RANGE	CABLE DIAMETER	W1	W2	H1	H2

5X				DR.BY:	Hu.CH
4X				CHKD:	Hu.CH
3X				APPD:	Billy
2X					
1X	ORIGINAL		Hu.CH		
REV.	DESCRIPTION		DR.BY	ECN. NO.	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±0.30	X°: ±1.0°
X.X: ±0.20	X.X°: ±0.5
X.XXX: ±0.10	X.XXX°: ±0.2

PART NO : H2027TF-PQ-XX

DWG. NO.:

TITLE :

2.0 Pitch Terminal

DATE: 2025-09-29

HJBRIGHT® 东莞市华晶电子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4