






Specifications:
Material And Finish:
Insulator:Nylon 9T UL94V-0
Color:See Ordering Information

Rating:
Current Rating:5.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature
Range:-40°~+125°C


Electrical:
Contact resistance:15m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute

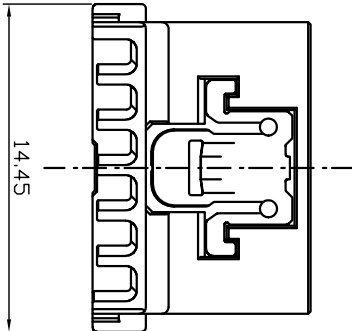


Ordering Information
H2028MR-06P-01-XA

- 1:—Series No.
2:—R:R/A Type
3:—No. of Positions
4:—A:A Type Black
B:B Type Nature
C:C Type Blue
D:D Type Red
5:—A:In Bag


A type Black




B type Nature



C type Blue



D type Red



5X				DR.BY: ZoIn	GENERAL TOLERANCE:		PART NO : H2028MR-06P-01-XA	HUBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED THIRD ANGLE PROJECTION A4	
4X					LINEAR	ANGLES			
3X				CHKD: Hu.CH	X: ±5.0°				
2X					X.X: ±0.30	X.X': ±3.0°	TITLE : 2.0mm Pitch ULH Series 6Pin Female connector / Right angle up		
1X	ORIGINAL	ZoIn			X.XX: ±0.30	X.XX': ±2.0°			
REV	DESCRIPTION	DR.BY	ECN. NO.	APPD: Biliy	X.XXX: ±0.15	X.XXX': ±1.0°	DATE: 04-Dec-2025		UNIT: mm