

Color: See Ordering Information

Rating:

Current Rating:5.0 Amp

Voltage Rating: 100V AC/DC

Operating Temperature





Range: $-40^{\circ} \sim +125^{\circ}\text{C}$

Electrical:

Contact resistance: 15m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage:1000V AC/Minute

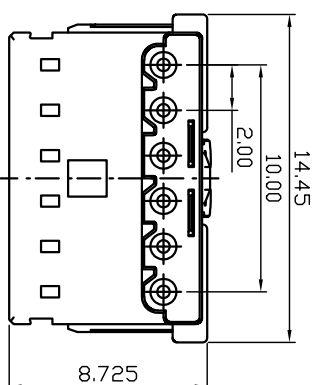

Ordering Information

H2028MR-06P-02-XA

1		2		3	
4		5			

1:—Series No.

2:—R:R/A Type

3:—No. of Positions

4:—A:A Type Black

B:B Type Nature

C:C Type Blue

D:D Type Red

5:—A:In Bag

Specifications: Material And Finish: Insulator:Nylon 9T UL94V-0 Color:See Ordering Information Rating: Current Rating:5.0 Amp Voltage Rating:100V AC/DC Operating Temperature Range:-40~+125°C Electrical: Contact resistance:15m Ohm Max Insulator resistance:100M ohm min. Withstanding Voltage:1000V AC/Minute Ordering Information H2028MR-06P-02-XA 1 2 3 4 5 1: — Series No. 2: — R/R/A Type 3: — No. of Positions 4: — A:A Type Black B:B Type Nature C:C Type Blue D:D Type Red 5: — A:n Bag															
A type Black				B type Nature				C type Blue				D type Red			